



**Innovations designed
to improve operations
profitability**

www.ydbvalves.com



About us

YDB VALVES LLP, a pioneer manufacturing company having good experience in the designing and manufacturing of a new concept instrumentation Valves: Manifolds, Monoflanges, SBB & DBB Valves both in needle and ball types, Floating and Trunnion design Ball Valves, strictly produced in according to the most stringent quality standards of safety and efficiency.

We have a fully well-equipped modern in-house manufacturing facility using CNC lathes, VMC, etc. with highly motivated team and up to date technology assisting us to achieve reliable products at competitive price with better product flexibility, consistency and optimum service.

Our experience in the understanding of applications requirements, combined with our high flexibility, allows us to develop customized solutions designed for customers' specific needs.

Our products are machined from the materials CF8M, SS316, SS316L, Duplex, Super Duplex, Monel, Inconel, etc.

Moreover, our valves production can be completed with complementary accessories, something that makes YDB VALVES a favorite and reliable partner for those companies that supply 'packages' of various matching goods. Our products are widely used in the Chemical, Petrochemical, Oil & Gas, Off-Shore, On-Shore, Power Generation, Naval industries, etc., used as components of plants and machineries with a high technological value.

Primary Isolation Valve Application

- Chemical
- Electronic
- Pharmaceutical
- Power Generation
- Marine
- Laboratory
- Packaging
- Oil and Gas
- Printing Industries
- Petro-Chemical
- Architectural
- Power

Our Company



We have well equipped modern manufacturing facility with good motivated skilled experience engineering and production staff. We manufacture each and every component of our products using CNC Lathes, Vertical Machining Centre, Manual Lathes Machine etc. Within given tolerances by closely monitoring critical dimensions, surface finishes, run out, sharp edges etc.




After referring and meeting the requirements as per drawing, under rigid quality controlled procedures approved to ISO 9001: 2015 which ensures consistent quality and high performance products.

Butterfly Valve Figure Number System

1	Size	The inch series is expressed with xxin; the metric series is expressed with xx, with the unit mm omitted					
2	Operation Type	1-Bare Stem	3-Worm Gear Operated	6**-Air Operated	7□-Hydraulic Operated	9-Electric Operated	Hand Operated (Omit)
3	Valve Type	D-Butterfly Valve DH-Check Butterfly Valve Dk-Vacuum Butterfly Valve DTF-Aeration Butterfly Valve Ds-Flexible Butterfly Valve					
4	Pressure	0a-PN6	0b-PN2.5	0-PN10	1-PN16 Class150	2-PN25	3-Class300
		4-PN40 Class400	6-PN64 Class600	9-Class900	10-PN100	1a-Class125	2a-Class250
5	Ends	RF-Raised Face	FF-Flat Face	MFM-Male and Female Face	RJ-Ring Joint	BW-Butt-Weld	WS-Wafe with 4 lugs WL-Wafe with no lug WF-Single Reinforcement Wafer Type WU-Unthreaded Hole Wafer Type LL-Full Lug Screw Wafer Type LU-U Screw Wafer Type
6	Structure Type	1-Middle Eccentric Structure	2-Single Eccentric Structure	3-Double Eccentric Structure	4-Variable Eccentric Structure		5-Three Eccentric Structure
7	Basic Material	C-WCB	C-C5	C6-WC6	C9-WC9	BL-LCB	CL-LCC
		8-CF8	8M-CF8M	3-CF3	3M-CF3M	ML-MONEL	H-IRON
8	*Material of Seat Face or Liner	H-HCr13S.S		E-18-8S.S	R-Mo2Ti S.S		F-PTFE
		D-Nitriding Steel		M-Monel Alloy	Y-Hard Face		X-Rubber

- Note:
1. Use 'W' to express seat sealing surface material which is processed directly by valve body.
 2. When the materials of sealing surface are different, use low hardness material symbol to express.
 3. Special requirements not shown, should be indicated in the purchase order.
 4. The models listed in the sample book have no reference to pressure, sizes and valve material symbols, they are to be decided by users.
 5. **6S spring Return, 6A Air Operated Control.
 6. B-Pressure Retaining Type, Q-Full Pressure Type, S-Locked Type.
 7. PN <0.25MPa, Omit Pressure.

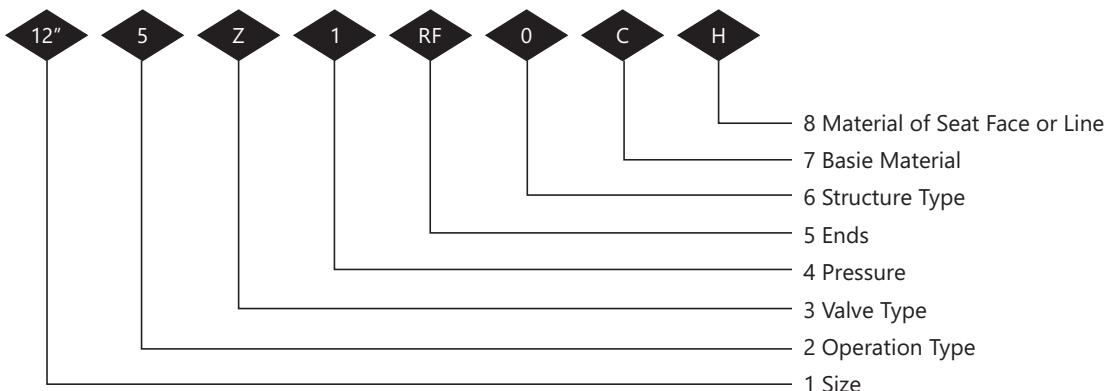

For Example

6"-3D1RF5CH


Butterfly valve, 6", Worm Gear Operated, ANSI Class 150, RF Flange Ends, Triple eccentric structure, Body & Disc Cast Steel WCB, 13Cr face Seat. 150-3D1RF5CH

Butterfly valve, DN150 PN16, Worm Gear Operated, ANSI Class150, RF Flange Ends, Triple eccentric structure, Body & Disc Cast Steel ECB, 13Cr Face Seat.


Butterfly Valve Design Features

Butterfly valves are used to open and close (seal type) or adjust the medium flow in pipes in the fields of foodstuff, drinks, chemical, industrial water treatment, high-rise constructions, water supply and drainage etc.. They are mainly structured as following.

1. Simple structure, small sizes, light weight and low installation dimensions. According to the types of body connection, they are basically classified to wafer type (including lug wafer type), flanged and welded.

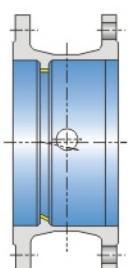


Flanged Connection

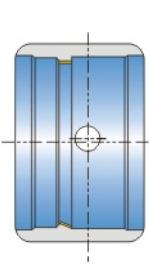

Butt-welded Connection



Wafer Connection

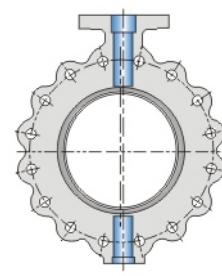

Lug Wafer Connection


2. Sealing materials may be soft hard, placed on body or disc, to meet different working conditions, and to effect good seal and long lift.

(1) Soft sealing structure (see fig. right), is applicable for single and double eccentric butterfly valves, pressure rating \leq CLASS 600. Centred sealing structure is applicable for pressure rating <CLASS 250. Sealing ring (PTFE) is placed on the valve body to feature the following.



- a. To effected dependable sea with no need of accessorial sealing ring or metal bracing ring.
- b. Bidirectional leakproof seal.
- c. Little maintenance and long service lift.

(2) Multilayer Hard Seal Structure (See fig. right)

Multilayer hard seal structure is applicable for single, double and triple eccentric butterfly valves, pressure rating <CLASS 600. And, triple eccentric butterfly valve can maintain two-way leak-tightness. Multilayer sealing ring is composite of stainless steel and nonmetal material. The nonmetal material can be flex-ible graphite, PTFE or non asbestos material etc. according to he actual working conditions.

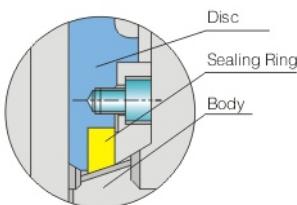


Soft Sealing Structure (Fig.a)

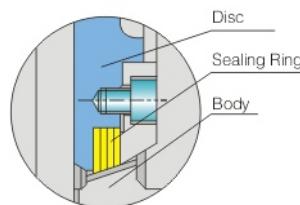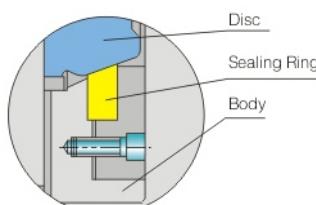


Multilayer Hard Seal Structure (Fig.b)

3. Elastic ring hard seal structure (see fig. right) is of the structure of J-type metal sealing ring. It is applicable for single and double eccentric butterfly valves, pressure rating <CLASS 300, Prov-ided with fireproof structure to adapt to conditions with great temperature changes, it is featured by outstanding seal. Long service life and easy workmanship.

3. Fireproof butterfly valves (see fig. Right) can stop the expansion of fire, Once the sealing seat of butterfly valves is on fire, the stainless Steel sealing ring will act to make butterfly valve immediately sealed.
4. When butterfly valve is fully opened, flow resistance is low. When partially opened, it may carry our sensitive flow control.
5. Low driving moment, easy and quick operation.

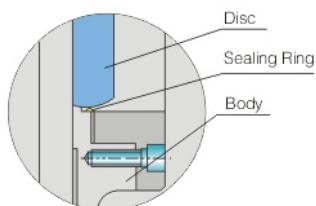

Elastic Ring Hard Seal Structure (Fig.c)

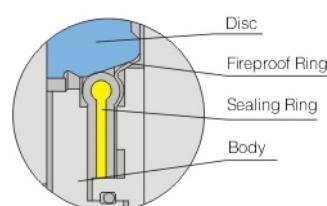


Soft Seal Fireproof Structure (Fig.d)

Sealing Principle of Double Eccentric Seal Butterfly Valve

The rotation center of disc (namely the center of valve shaft) and the centerline of body form up a 'b' eccentric on the base of single eccentric butterfly valve, making the sealing face of disc disengaged from seat sealing face more quickly than single eccentric seal butterfly valves during the process of open and close. Once disc turns to 8° - 12° , the disc sealing face will be completely disengaged from the seat sealing face. Once fully opened, a gap 'Y' will be formed up between the two sealing faces. This type of butterfly valves are designed to have greatly lowered the mechanical wear and extrusion deformation between the two sealing faces, making the sealing performance of butterfly valve much better.


The characteristic of this structure is to make stem axis not only deviated from the center of disc, but also the center or the body. The effect of double eccentric is that, when valve has been opened, disc can be quickly disengaged from seat, thus to greatly eliminate the unnecessary excessive extrusion and scratch between the disc and seat, reduce opening resistance, lower the abrasion and improve the service life of seat. As scratch has been greatly lowered, metal seat can be used for double eccentric butterfly valve, so that butterfly valves are able to be used in high temperature fields. However, as its seal is positioned sealing construction, i.e. the sealing faces disc and seat is lineal contact, disc extruding seat to produce elastic deformation, thus to effect the sealing performance. This has high requirement on close position, especially for those with metal seat, and is given poor pressure endurance. This is why butterfly valves are, conventionally, not resistant to high temperature and leakage.

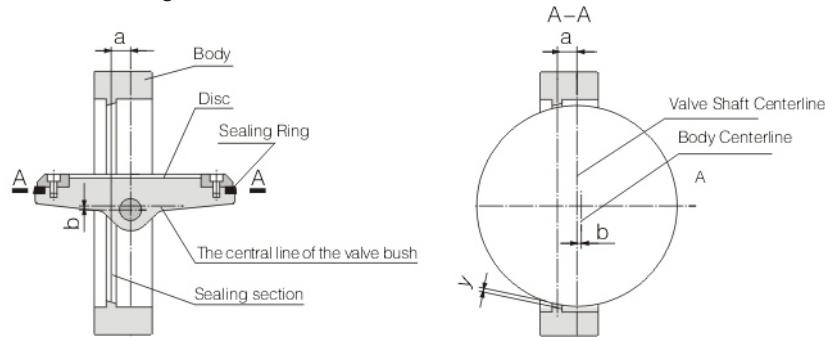

Sealing Structure of Double Eccentric Seal Butterfly Valve

Principal of Seat Sealing

1. Disc closed, medium enters from the upstream of seat. Under the force of medium, sealing ring will get close to the sealing face of disc, and the elasticity and deformation of sealing ring will function to guarantee the sealing performance.
2. Disc closed, medium enters from the downstream of seat. Under the extrusion of press board ring, sealing will overcome the acting force of medium and get close to the sealing face of disc, thus to guarantee the sealing performance.

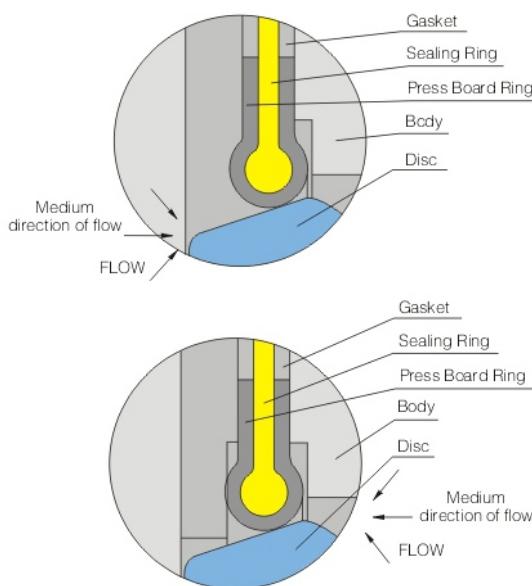


High performance butterfly valve (Wafe)

Generally high performance butterfly valves are single eccentric or double eccentric. As to double eccentric structure, valve shaft is designed deviated from the centerline of sealing face to form up the first eccentric, and slightly deviated from the centerline of pipe to form up the second eccentric. The eccentrics are to make seat disengaged from sealing ring to lower the friction when disc is opened to approximately 20°.

Soft seal seat, made of TFE, PTFE or RTFE, fireproof construction conforming to API607 fire test, provided with sealing property in case of fire.


Hard seal structure is provided with intrinsical fireproof property, Two-way-leak-proof seal. Seat replaced with no need to take off disc and stem. The upper and lower stems provided with low-friction sleeves to lower the frictional force of stem when valve is opened or closed. Double eccentric structure to lower the abrasion at the upper and lower ends of seal in case of frequent open and close, The interface between valve and drive unit conforms to ISO5211. Product quality is under rigorous control according to ISO9001.

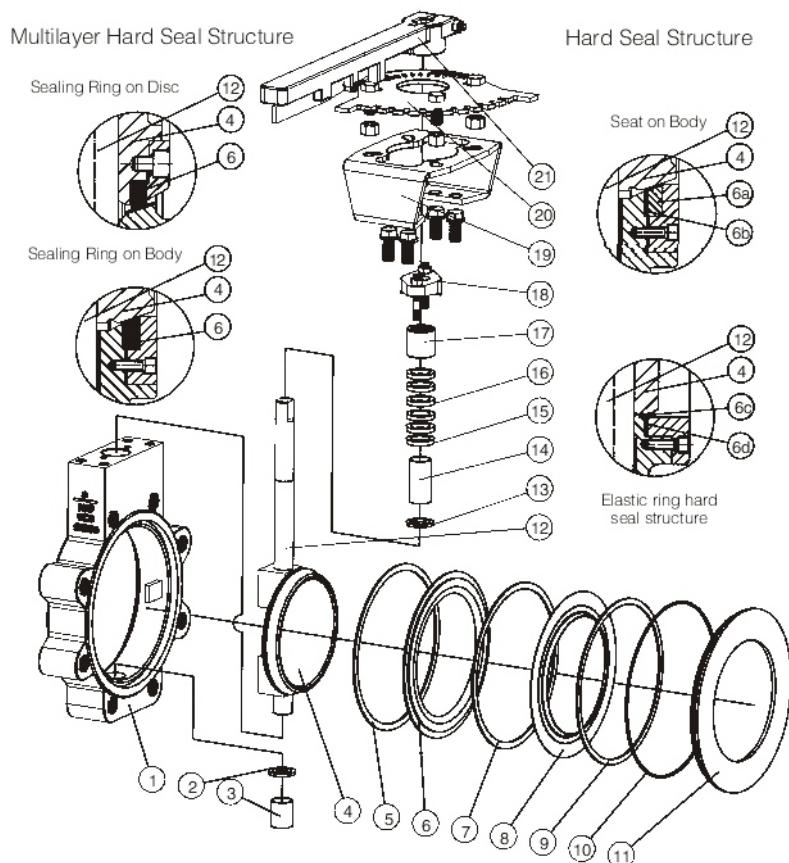

Material List (High Performance Fire-safe Butterfly Valve)

No.	Part Name	Materials	Optional Materials
1	Body	Cast Steel	SS, Monel
2	Spacer	SS	SS, Monel
3	Bushing	PTFE+Bronze	Luberized Bronze
4	Disc	Cast Steel	SS, Monel
5	Gasket	Graphite	Graphite
6	Seal Ring	PTFE/PTFE+SS	SS+Graphite
6a	Seat	Carbon Steel+13Cr	SS, Monel
6b	Gasket	Graphite	Graphite
6c	Seal Ring	SS	--
6d	Gasket	Graphite	Graphite
7	Gasket	Graphite	Graphite
8	Metalseat tongue	SS	--
9	Gasket	Graphite	Graphite
10	Retainer	NBR	FPM
11	Retainer Flange	Carbon Steel	SS, Monel
12	Stem	SS	316, Monel
13	Spacer	SS	SS, Monel
14	Bushing	PTFE+Bronze	Luberized Bronze
15	Packing Seat	SS	SS, Monel
16	Packing	Graphite	PTFE
17	Gland	Carbon Steel	SS
18	Packing Bushing	SS	SS
19	Yoke	Carbon Steel	--
20	Limit Disc	Carbon Steel	SS
21	Lever	Carbon Steel	--


Flange Double Eccentric Butterfly Valve

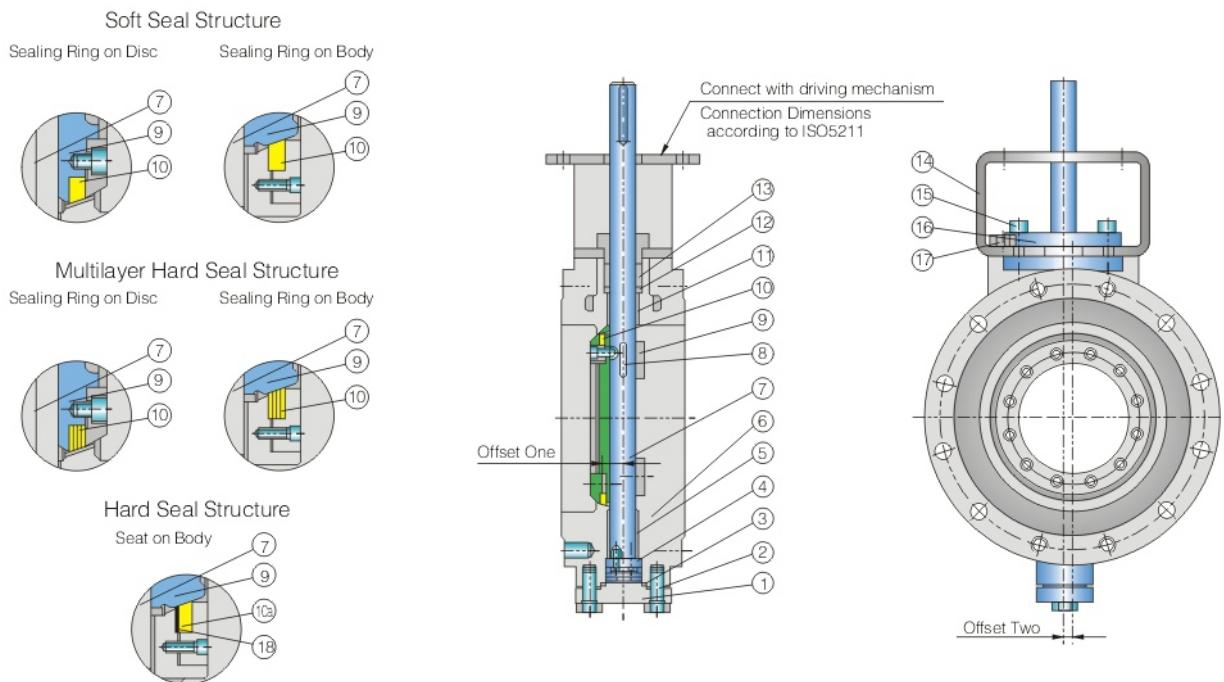

Material List (Flange Butterfly Valve)

No.	Part Name	Materials	Optional Materials
1	Cover	Carbon Steel	SS, Monel
2	Bolt	Alloy Steel	SS, Monel
3	Gasket	Graphite	Graphite
4	Spacer	SS	SS, Monel
5	Bushing	PTFE+Bronze	Luberized Bronze
6	Body	Cast Steel	SS, Monel
7	Stem	SS	316, Monel
8	Key	SS	SS, Monel
9	Disc	Cast Steel	SS, Monel
10	Seal Ring	PTFE+SS	NBR/SS+Graphite
10a	Seat	Carbon Steel+13Cr	SS, Monel
11	Bushing	PTFE+Bronze	Luberized Bronze
12	Packing Seat	SS	SS, Monel
13	Packing	Graphite	PTFE
14	Yoke	Carbon Steel	--
15	Bolt	Alloy Steel	SS, Monel
16	Gland	Carbon Steel	SS
17	Bolt	Alloy Steel	SS, Monel
18	Gasket	Graphite	Graphite

Welding Butterfly Valve

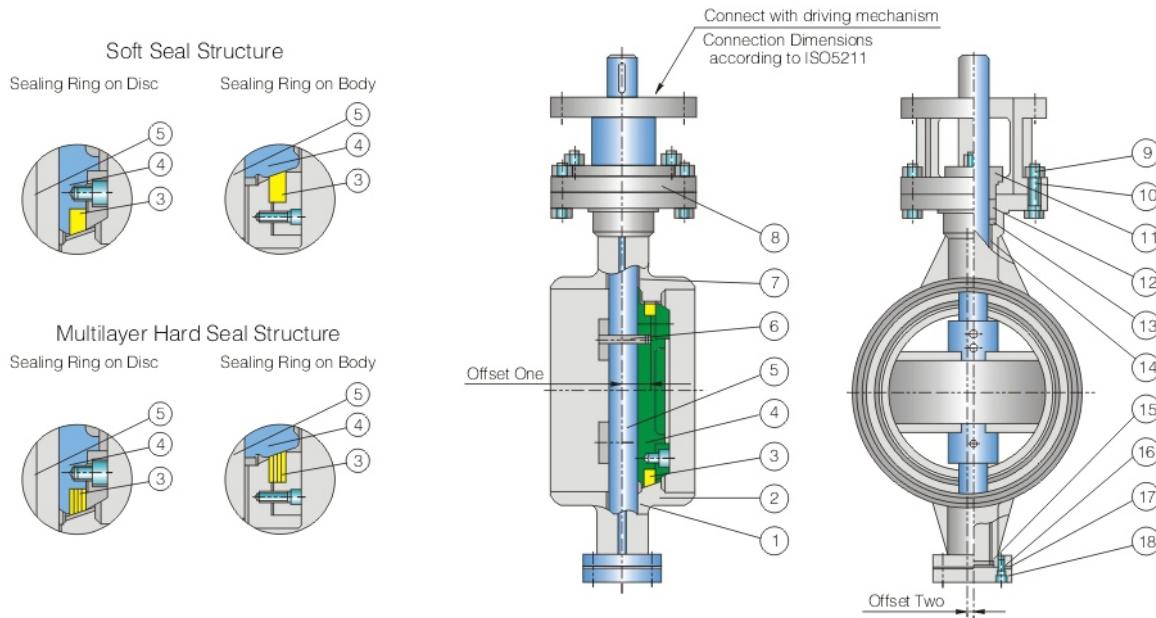

Material List (Welding Butterfly Valve)

No.	Part Name	Materials	Optional Materials
1	Bushing	PTFE+Bronze	Luberized Bronze
2	Body	Cast Steel	SS, Monel
3	Seal Ring	PTFE+SS	NBR/SS+Graphite
4	Disc	Cast Steel	SS, Monel
5	Stem	SS	316, Monel
6	Pin	SS	SS, Monel
7	Bushing	PTFE+Bronze	Luberized Bronze
8	Yoke	Carbon Steel	--
9	Nut	Carbon Steel	Alloy Steel, SS
10	Bolt	Alloy Steel	SS, Monel
11	Gland	Carbon Steel	SS
12	Packing	Graphite	PTFE
13	Packing Seat	SS	SS, Monel
14	Bushing	PTFE+Bronze	Luberized Bronze
15	Half Ring	SS	316 Monel
16	Bolt	Alloy Steel	SS, Monel
17	Gasket	Graphite	Graphite
18	Cover	Carbon Steel	SS

Expansion Butterfly Valve

Expansion butterfly valve integrates the functions of both flanged butterfly valve and pipe expansion unit, performed not only to throttle, but also to eliminate the internal force produced by temperature difference, namely the effect of expansion. It is used to adjust and cut off the flow of all non corrosive gas, liquid and semi liquid, as well as solid particle pipes and containers in the industries of electric power, metallurgy, petroleum, chemical, coal gas, heat supply, hydro power, papermaking, textile, medicine, foodstuff, water supply and drainage, energy sources and etc. Mounted randomly at any positions regardless of the types of medium and the direction of flow, it can also be used to adjust the space between the two flanges upon the installation of valve.

Features of Expansion Butterfly Valve

1. Original design and distinctive structure.
2. Small sizes and light weight.
3. Labor-saving operation and quick open-close.
4. Adjustable and replaceable seal, dependable sealing, low fluid resistance and energy conservation.


Installation Instructions of Expansion Butterfly Valve

1. Before installation, expansion butterfly valve shall be kept horizontally flat and away from impact.
2. The structural length of expansion butterfly valve is kept at the minimum upon going our of factory. To install, pull it to mounting length (namely designed length)
3. In case of the space between pipes exceeds the length of expansion valve, adjust the space between pipes and never pull the expansion valve by force, as it may damage the valve.
4. Expansion butterfly valve may be mounted at any position for the purpose of temperature compensation. After pipe has been mounted, put brackets at the two ends along with the pipe axial line, thus to prevent the expansion pipe of the valve from being pulled out (Fig. 1). The bearing force of brackets is calculated as the formula below. Never take the brackets off in service.

$$F > \frac{\pi}{4} PS \cdot DN^2 \cdot (\text{kgf})$$

Test: PS-Test pressure of pipeline, DN-Diameter of pipeline

5. When expansion butterfly valve is not used for temperature compensation, but used only for convenience of replacement and repair, it can be limited by bolts that are symmetrically fastened to closely clamp the expansion butterfly valve, thus to prevent expansion pipe from being pulled out (Fig.2), as it may damage the expansion butterfly valve, pipeline or constructions. The diameter of bolts may be that of flange bolts. The bolt strength, bearing test pressure and pipeline tension may be calculated according to the formula above. Never take the limit bolts off in service. (Bolts are supplied otherwise).
6. Don't dismantle the expansion butterfly valve on the pipe construction site.
7. This butterfly valve is precisely machined and closely mated, adn shouldn't be repeatedly pulled or pressed at random. Upon installation, the pipes at the two ends of expansion valve shall be kept concentric and the two flange faces on pipeline shall be parallel.
8. Flange fixing bolts shall be symmetrically fastened, never fasten on single side by force.
9. Expansion pipe is mounted behind valve.
10. The expansion part of valve cannot be mounted at the corner or end of pipeline.

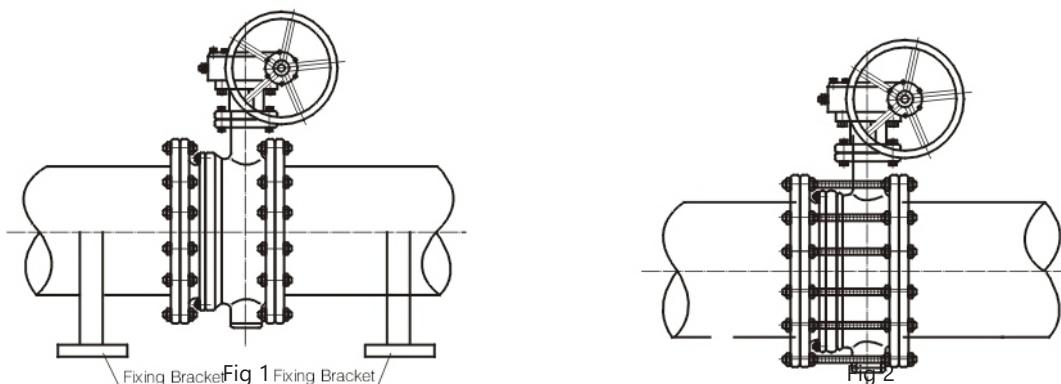

Double Eccentric Butterfly Valve Torques (NM)

High Performance Fire-safe Butterfly Valve Torques (NM)

Size		Pressure									
DN(mm)	NPS	100PSI	150PSI	200PSI	285PSI	400PSI	600PSI	740PSI	1000PSI	1200PSI	1480PSI
50	2"	--	--	--	--	--	--	--	--	--	--
65	2½"	--	--	--	--	--	--	--	--	--	--
80	3"	67	--	87	107	116	134	147	179	215	256
100	4"	71	--	92	113	130	167	198	258	302	371
125	5"	130	--	169	228	--	--	--	--	--	--
150	6"	198	--	297	424	453	511	559	606	698	856
200	8"	463	--	531	593	680	870	1039	1314	1621	1909
250	10"	610	--	815	1037	1129	1297	1424	2271	2700	3175
300	12"	936	--	1328	1780	1907	2121	2288	3576	4221	5011
350	14"	1644	--	1743	1829	2754	3841	4604	5566	6335	7048
400	16"	1896	--	2145	2306	4576	6489	7828	9457	10767	11976
450	18"	2813	--	3017	3220	5491	7813	9439	11411	12993	14451
500	20"	3603	--	3888	4180	7698	11025	13355	16157	18383	20450
600	24"	5722	--	6168	6547	11784	16948	20495	24766	28190	31365
700	28"	6542	8022	--	--	--	--	--	--	--	--
750	30"	11570	10813	12349	13118	25376	37002	45137	--	--	--
800	32"	--	--	--	--	--	--	--	--	--	--
900	36"	16213	15139	17422	18292	--	--	--	--	--	--
1000	40"	--	--	--	--	--	--	--	--	--	--
1050	42"	18869	23727	--	--	--	--	--	--	--	--
1200	48"	33251	34121	36505	38618	--	--	--	--	--	--
1350	54"	--	39375	--	--	--	--	--	--	--	--

PTFE Seat Butterfly Valve Torques (NM)

Size		Pressure									
DN(mm)	NPS	100PSI	200PSI	285PSI	300PSI	400PSI	600PSI	740PSI	1200PSI	1480PSI	
50	2"	--	--	37	--	--	--	--	--	--	--
65	2½"	31	39	46	47	55	71	82	95	142	
80	3"	43	54	64	66	77	100	115	133	199	
100	4"	83	111	134	138	166	222	261	305	333	
125	5"	125	167	202	208	250	333	391	458	700	
150	6"	188	250	304	313	375	500	588	687	778	
200	8"	363	476	572	589	702	929	1087	1268	1409	
250	10"	602	806	980	1010	1215	1623	1909	2236	2862	
300	12"	910	1250	1538	1589	1929	2609	3084	3628	4579	
350	14"	1052	1411	1715	1767	2127	2844	3346	4824	5357	
400	16"	1317	1758	2133	2199	2640	3522	4139	8202	9124	
450	18"	1817	2488	3058	3159	3830	5172	6111	9893	11005	
500	20"	2501	3346	4064	4191	5037	6726	7910	13999	15569	
600	24"	3496	4698	5719	5900	7102	9505	11188	21467	23885	
700	28"	--	--	--	--	--	--	--	--	--	
750	30"	4949	6678	8021	9169	12451	18157	22156	--	--	
800	32"	--	--	--	--	--	--	--	--	--	
900	36"	5982	8406	10151	--	--	--	--	--	--	
1000	40"	--	--	--	--	--	--	--	--	--	
1050	42"	9525	12609	16698	--	--	--	--	--	--	
1200	48"	14914	20506	25260	--	--	--	--	--	--	

Flow Coefficients (Cv Values)

Flow coefficient is an index to measure the flow capacity of valve. The more the flow coefficient is, the less the pressure loss upon fluid flowing through the valve. The values of flow coefficient differ from the sizes, types and structures of valves. Valve of different types and specifications should be separately tested to make certain of its value of flow coefficient. For valves of the same structure, the valve of flow coefficient differs according to the directions of fluid through the valves. The differences is usually caused by the difference in pressure recovery. The table below is the flow coefficient of double eccentric butterfly valve, used for reference to choose valve flow coefficient. Cv means the American gallons of +60° F(+16° C) water flowing through the valve per minute under 1 pound/inch²(0.006894757Mpa) pressure drop.

High Performance Butterfly Valve Flow Coefficients

Degree Open		10°C	20°C	30°C	40°C	50°C	60°C	70°C	80°C	90°C
Size	Pressure									
2"	150	1.5	6	14	25	39	56	76	99	102
	300	1.4	6	13	24	36	52	71	95	100
	600	1.4	5	13	23	35	51	70	90	93
2½"	150	2.2	9	21	37	56	80	110	142	146
	300	2.1	8	19	34	52	75	102	136	143
	600	2.0	8	19	33	51	73	100	130	133
3"	150	3.4	14	32	57	87	125	171	221	228
	300	3.2	13	30	53	81	117	159	212	223
	600	3.1	12	29	52	79	114	156	202	208
4"	150	6.8	27	63	114	171	248	338	437	451
	300	6.2	25	58	104	157	228	310	414	435
	600	5.8	23	54	98	147	213	290	375	387
5"	150	10.8	43	100	180	271	392	535	692	714
	300	9.8	40	92	165	248	361	491	655	688
6"	150	16.5	66	154	278	419	607	827	1070	1103
	300	14.9	60	139	250	377	546	744	992	1041
	600	14.7	59	137	247	372	538	734	950	979
8"	150	30.9	124	289	520	784	1135	1584	2002	2064
	300	27.3	109	255	459	692	1001	1365	1820	1911
	600	26.8	107	250	451	679	983	1341	1734	1788
10"	150	52.8	211	492	886	1336	1934	2638	3411	3517
	300	45.6	183	426	767	1156	1673	2282	3042	3194
	600	41.2	165	384	692	1044	1511	2060	2665	2747
12"	150	72.6	290	677	1219	1838	2660	3628	4690	4837
	300	63.3	253	590	1063	1602	2319	3163	4217	4428
	600	58.4	233	545	981	1479	2140	2918	3774	3891
14"	150	90	392	914	1646	2481	3592	4989	6530	6857
	300	81	326	760	1368	2063	2986	4072	5430	5702
	600	73	292	682	1228	1838	2680	3655	4727	4873
16"	150	132	531	1230	2229	3361	4865	6634	8845	9287
	300	109	435	1015	1827	2755	3988	5438	7850	8243
	600	96	385	899	1619	2423	3533	4818	6231	6424
18"	150	171	684	1596	3873	4332	6270	8550	11270	11400
	300	139	555	1295	2331	3515	5088	6938	9250	9712
20"	150	207	828	1932	3478	5244	7590	10350	13800	14420
	300	158	630	1470	2646	3990	5775	7875	10150	10658
24"	150	315	1260	2940	5292	7890	11550	15750	21000	22050
	300	242	966	2254	4057	6118	8855	12075	16100	16205
30"	150	491	1965	4585	8253	12445	18012	24563	32750	34388
	300	404	1614	3766	6779	10222	14795	20175	26900	38245
36"	150	707	2830	6602	11884	17920	25938	35370	45745	47160
42"	150	963	3851	8987	16176	24392	35304	48143	62264	64190
48"	150	1258	5030	11738	21128	31859	46111	62881	81324	83840

Butterfly Valve Flow Coefficients (Sealing Ring on The Disc)

Size		PN0.25	PN0.6	PN1.0	PN1.6	PN2.5	PN4.0	Class150
DN	NPS							
80	3"	--	--	--	291	291	--	291
100	4"	--	--	--	413	413	--	413
125	5"	--	--	--	903	903	--	903
150	6"	--	--	--	1150	1120	--	1020
200	8"	--	--	--	2640	1830	1660	1830
250	10"	--	--	--	4110	3710	2570	3710
300	12"	--	--	--	7030	5620	3710	5620
350	14"	--	--	--	9620	7460	5250	7460
400	16"	--	16100	14000	12500	9730	7300	9730
450	18"	--	20900	18700	15800	12300	9430	12300
500	20"	--	26600	24100	19500	15200	11600	15200
600	24"	--	38300	34700	28200	21900	16700	21900
700	28"	53500	52100	47300	38400	29800	24100	29800
750	30"	61400	59800	54300	44000	34200	27600	34200
800	32"	69800	68000	61800	50100	39000	32300	39000
900	36"	91000	86100	78300	64400	49700	--	49700
1000	40"	119000	106000	96500	79400	68300	--	68300
1100	44"	150000	129000	117000	--	--	--	--
1200	48"	178000	153000	139000	--	--	--	--
1300	52"	209000	179000	163000	--	--	--	--
1400	56"	242000	208000	190000	--	--	--	--
1500	60"	278000	239000	218000	--	--	--	--
1600	64"	317000	271000	247000	--	--	--	--
1800	72"	401000	344000	328000	--	--	--	--
2000	80"	495000	449000	414000	--	--	--	--
2200	88"	621000	560000	515000	--	--	--	--
2400	96"	739000	689000	628000	--	--	--	--
2600	104"	868000	837000	--	--	--	--	--
2800	112"	1010000	970000	--	--	--	--	--
3000	120"	1210000	1110000	--	--	--	--	--
3200	128"	1370000	--	--	--	--	--	--
3400	136"	1540000	--	--	--	--	--	--
3600	144"	1810000	--	--	--	--	--	--
3800	152"	2010000	--	--	--	--	--	--
4000	160"	2230000	--	--	--	--	--	--

Note: 1. The butterfly valve with flow coefficient in the table above is soft seal structure with sealing ring mounted on the disc.


2. DN≥400, two-piece structure of valve shaft.

Multilayer Hard Seal Butterfly Valve Flow Coefficients (Sealing Ring on The Disc)


Size		PN0.25	PN0.6	PN1.0	PN1.6	PN2.5
DN	NPS					
150	6"	--	739	739	536	454
200	8"	--	1860	1440	1100	1040
250	10"	--	2930	2350	2350	1840
300	12"	--	5070	4390	3730	2880
350	14"	8390	7040	6250	5640	4040
400	16"	11100	10400	8560	7410	5700
450	18"	14900	13300	11600	9490	7420
500	20"	18500	16600	14600	11900	9300
600	24"	29100	26000	22100	17300	13500
700	28"	39800	36000	30300	24000	20100
750	30"	46700	41400	34900	27700	23400
800	32"	55600	47600	40000	31700	26700
900	36"	70400	61200	52200	42400	35300
1000	40"	88800	75900	64700	52700	46600
1100	44"	108000	92100	78400	67700	58700
1200	48"	129000	112000	97500	83300	77300
1300	52"	153000	132000	116000	99300	--
1400	56"	186000	153000	139000	--	--
1500	60"	221000	178000	161000	--	--
1600	64"	253000	206000	194000	--	--
1800	72"	321000	266000	--	--	--
2000	80"	398000	353000	--	--	--
2200	88"	501000	435000	--	--	--
2400	96"	599000	--	--	--	--
2600	104"	718000	--	--	--	--
2800	112"	838000	--	--	--	--
3000	120"	963000	--	--	--	--

Note: 1. The butterfly Valve with flow coefficient in the table above is multilayer hard seal structure, with sealing ring mounted on the disc.


2. One-piece stem.

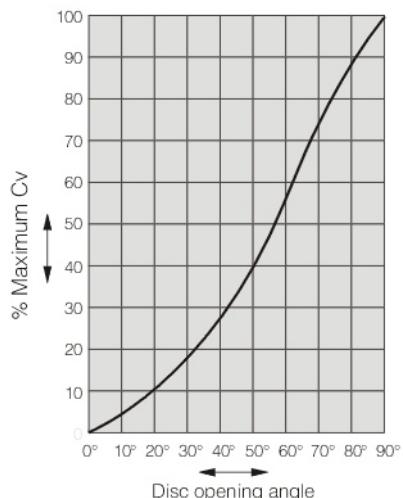Butterfly Typical Characteristic Curve


Typical Characteristic Curve of High Performance Butterfly Valve

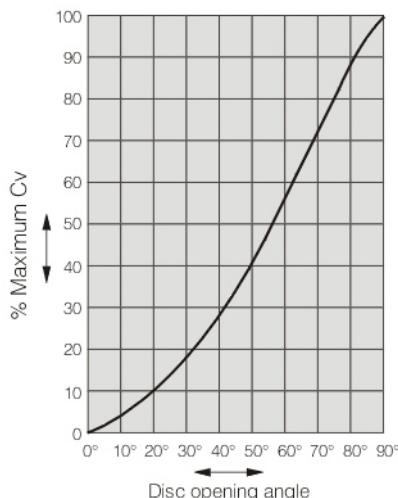

Typical Characteristic Curve of Double Eccentric Soft Butterfly Valve

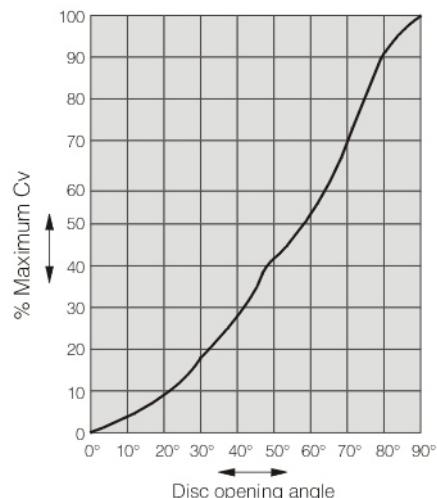

Typical Characteristic Curve of Double Eccentric Hard Butterfly Valve

For sizes and classes not shown, please contact our Sales Department.

Double Eccentric Butterfly Valve Product Line


Size (mm)		Pressure								
DN	NPS	PN0.25MPa	PN0.6MPa	PN1.0MPa	PN1.6MPa	PN2.5MPa	PN4.0MPa	Class150	Class300	Class600
50	2"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆
65	2 1/2"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆
80	3"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆
100	4"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆
125	5"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	△/★/☆	△/★/☆
150	6"	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	●/△/★/☆	△/★/☆	△/★/☆
200	8"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆
250	10"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆
300	12"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆
350	14"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--
400	16"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--
450	18"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--
500	20"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--
600	24"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--
700	28"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	★/☆	★/☆	--	--
750	30"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	★/☆	★/☆	--	--
800	32"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	★/☆	★/☆	--	--
900	36"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--	★/☆	--	--
1000	40"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--	★/☆	--	--
1050	42"	△/★/☆	△/★/☆	△/★/☆	△/★/☆	△/★/☆	--	★/☆	--	--
1100	44"	★/☆	★/☆	★/☆	★/☆	★/☆	--	★/☆	--	--
1200	48"	★/☆	★/☆	★/☆	★/☆	★/☆	--	★/☆	--	--
1300	52"	★/☆	★/☆	★/☆	★/☆	★/☆	--	★/☆	--	--
1400	56"	★/☆	★/☆	★/☆	★/☆	★/☆	--	★/☆	--	--
1500	60"	★/☆	★/☆	★/☆	★/☆	★/☆	--	--	--	--
1600	64"	★/☆	★/☆	★/☆	★/☆	★/☆	--	--	--	--
1800	72"	★/☆	★/☆	★/☆	--	--	--	--	--	--
2000	80"	★/☆	★/☆	★/☆	--	--	--	--	--	--
2200	88"	★/☆	★/☆	★/☆	--	--	--	--	--	--
2400	96"	★/☆	★/☆	★/☆	--	--	--	--	--	--
2600	104"	★/☆	★/☆	--	--	--	--	--	--	--
2800	112"	★/☆	★/☆	--	--	--	--	--	--	--
3000	120"	★/☆	★/☆	--	--	--	--	--	--	--
3200	128"	★/☆	--	--	--	--	--	--	--	--
3400	136"	★/☆	--	--	--	--	--	--	--	--
3600	144"	★/☆	--	--	--	--	--	--	--	--
3800	152"	★/☆	--	--	--	--	--	--	--	--
4000	160"	★/☆	--	--	--	--	-	--	--	--

Note: ● stands for handle operated valves; ☆ stands for gearbox operated valves; △ stands for air operated valves; ★ stands for electrically operated valves; / stands for no option of this. Those not covered in the table can be custom made to user's requirements.

Technical Specification

Design Standard		GB/T12238/EN593/DIN/GOST						API609, MSS SP-67		
Pressure-Temperatured Rating		GB/T12224/DIN/GOST						API609		
Face-Face		GB/T12221						API609		
Flange Ends		GB/T9113, DIN3202, EN1092, GOST12815						ASME B16.1/B16.5/B16.47/BS4504		
Inspection & Test		JB/T9092, GB/T13927, DIN3230, EN598						API598		
Nominal Pressure (MPa)		0.25	0.6	1.0	1.6	2.5	4.0	Class150	Class300	Class600
TEST Pressure (MPa)	Shell Test	0.375	0.9	1.5	2.4	3.75	6.0	2.93	7.58	15.0
	High Pressure Seal Test	0.275	0.66	1.1	1.76	2.75	4.4	2.07	5.52	11.03
	Low Pressure Seal Test	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Applicable Temperature		-196°C-550°C Different raw material for different work temperature.								
Applicable Medium		Water, oil gas and other causticity medium (Different raw material for different medium)								

Double Eccentric Wafer Butterfly Valve

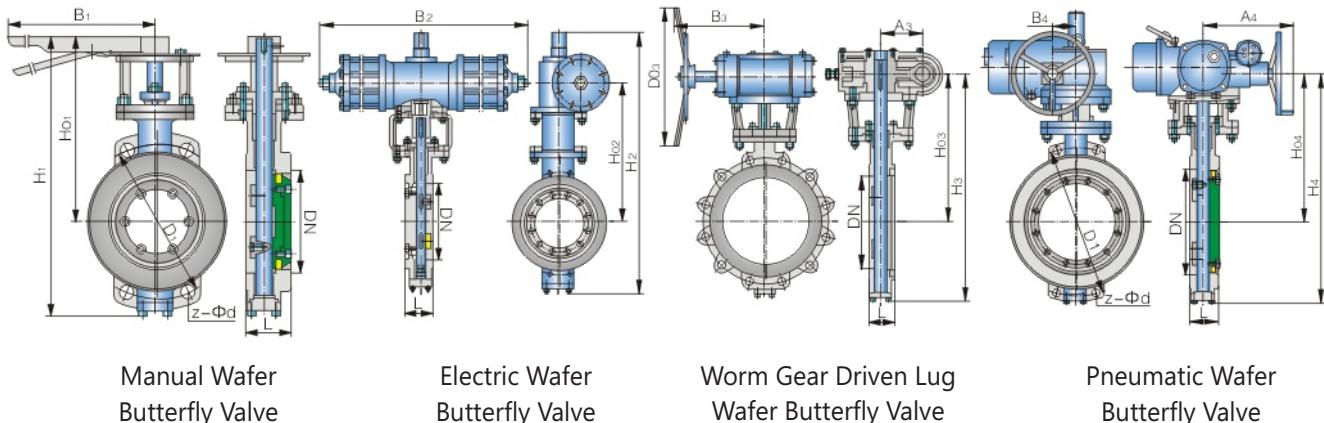

Main Outline Dimensions and Weight

DN	L		D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric				0.6MPa mm
	Series 1	Series 2			H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4	
50	43	43	110	4-Φ 14	233	160	200	--	--	--	266	143	106	50	160	--	--	--	--	
65	46	46	130	4-Φ 14	275	179	230	--	--	--	290	178	140	63	180	--	--	--	--	
80	49	64	150	4-Φ 18	316	198	250	--	--	--	320	185	140	63	180	320	185	178	180	
100	56	64	170	4-Φ 18	341	211	270	--	--	--	342	193	140	63	240	340	198	178	180	
125	64	70	200	8-Φ 18	362	217	300	--	--	--	378	219	140	63	240	340	205	178	180	
150	70	76	225	8-Φ 18	384	235	350	--	--	--	415	245	140	63	240	415	241	178	180	
200	70	84	280	8-Φ 18	--	--	--	695	325	275	470	298	170	84	300	512	263	235	370	
250	76	114	335	12-Φ 18	--	--	--	750	355	275	535	328	170	84	300	570	292	235	370	
300	83	114	395	12-Φ 22	--	--	--	935	475	378	606	365	200	108	400	668	340	235	370	
350	92	127	445	12-Φ 22	--	--	--	1000	510	378	695	408	200	108	400	745	385	235	370	
400	102	140	495	16-Φ 22	--	--	--	1145	590	378	755	446	240	128	400	827	425	235	370	
450	114	152	550	16-Φ 22	--	--	--	1205	632	530	815	475	330	152	600	915	462	235	370	
500	127	152	600	20-Φ 22	--	--	--	1256	665	530	905	525	370	168	600	995	500	235	370	
600	154	178	705	20-Φ 26	--	--	--	1526	830	530	1050	610	370	320	600	1183	605	245	515	
700	165	229	810	24-Φ 26	--	--	--	1640	903	530	1276	795	515	237	800	1460	734	245	515	
800	190	241	920	24-Φ 30	--	--	--	1786	972	680	1384	837	515	237	800	1589	803	245	515	
900	203	241	1020	24-Φ 30	--	--	--	1917	1052	680	1505	885	515	237	800	1856	990	360	540	
1000	216	300	1120	28-Φ 30	--	--	--	2600	1170	680	1620	946	570	785	600	1958	1050	360	540	
1200	254	360	1340	32-Φ 33	--	--	--	--	--	--	2185	1165	570	785	600	2013	1165	360	540	

Main Outline Dimensions and Weight

DN	L		D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric				2.5MPa mm
	Series 1	Series 2			H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4	
	50	43	43	125	4-Φ 18	225	160	200	--	--	266	143	160	50	106	--	--	--	--	
65	46	46	145	8-Φ 18	250	175	230	--	--	--	290	175	160	63	140	--	--	--	--	
80	49	64	160	8-Φ 18	260	190	250	--	--	--	513	265	160	63	140	552	265	178	180	
100	56	64	190	8-Φ 22	295	195	270	--	--	--	538	282	160	63	140	585	290	178	180	
125	64	70	220	8-Φ 26	330	215	300	--	--	--	560	295	300	63	140	610	305	178	180	
150	70	76	250	8-Φ 26	356	225	350	--	--	--	605	300	300	63	140	765	315	178	180	
200	71	89	310	12-Φ 26	--	--	--	695	327	275	749	321	400	84	150	810	304	235	370	
250	76	114	370	12-Φ 30	--	--	--	750	355	275	803	330	400	84	150	910	336	235	370	
300	83	114	430	16-Φ 30	--	--	--	955	472	378	880	365	600	108	200	1000	386	235	370	
350	92	127	490	16-Φ 33	--	--	--	1030	515	378	960	410	600	108	200	1055	425	235	370	
400	102	140	550	16-Φ 36	--	--	--	1185	595	530	1032	445	600	152	240	1108	456	235	370	
450	114	152	600	20-Φ 36	--	--	--	1270	632	530	1118	487	330	600	144	1140	190	235	370	
500	127	152	660	20-Φ 36	--	--	--	1335	665	530	1190	520	370	600	220	1238	552	235	370	
600	154	178	770	20-Φ 39	--	--	--	1642	829	680	1380	625	370	600	220	1399	365	245	515	
700	165	229	875	24-Φ 42	--	--	--	1785	905	680	1582	745	515	800	279	1611	750	360	540	
800	190	241	990	24-Φ 48	--	--	--	1915	970	680	1713	810	515	800	279	1782	820	360	540	
900	203	241	1090	28-Φ 48	--	--	--	--	--	--	1870	875	515	800	279	1915	886	385	565	
1000	216	300	1210	28-Φ 56	--	--	--	--	--	--	2000	940	570	600	368	2040	945	385	565	
1200	254	362	1420	32-Φ 56	--	--	--	--	--	--	2118	1060	570	600	378	2184	1053	400	770	

Main Outline Dimensions and Weight

DN	L		D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric				4.0MPa mm
	Series 1	Series 2			H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4	
	50	43	43	125	4-Φ 18	225	160	200	--	--	266	143	106	50	200	--	--	--	--	
65	46	46	145	8-Φ 18	265	175	230	--	--	--	290	175	143	80	250	--	--	--	--	
80	49	64	160	8-Φ 18	275	190	270	--	--	--	395	245	143	80	300	530	240	178	180	
100	56	64	190	8-Φ 22	310	205	300	--	--	--	356	205	200	108	400	555	205	178	180	
125	64	70	220	8-Φ 26	347	220	350	--	--	--	375	213	200	108	400	582	215	178	180	
150	70	76	250	8-Φ 26	374	235	380	--	--	--	439	260	200	108	600	609	260	235	370	
200	71	84	320	12-Φ 30	--	--	--	750	375	275	520	275	330	140	600	755	275	235	370	
250	76	114	385	12-Φ 33	--	--	--	905	455	378	600	315	330	140	600	818	315	235	370	
300	83	114	450	16-Φ 33	--	--	--	1085	538	503	692	365	370	220	800	912	363	245	515	
350	92	127	510	16-Φ 36	--	--	--	1160	576	503	776	408	370	220	800	983	406	245	515	
400	102	140	585	16-Φ 39	--	--	--	1230	609	503	864	443	370	220	800	1058	440	245	515	
450	114	152	610	20-Φ 39	--	--	--	1520	765	680	1128	525	512	279	400	1135	545	360	540	
500	127	152	670	20-Φ 42	--	--	--	1335	665	530	1257	664	512	279	400	1245	600	360	540	
600	154	229	795	20-Φ 48	--	--	--	--	--	--	1380	625	512	279	400	1414	663	360	540	
700	165	241	990	24-Φ 48	--	--	--	--	--	--	1435	712	570	368	600	--	--	--	--	
800	190	241	1030	24-Φ 56	--	--	--	--	--	--	1518	782	570	368	600	--	--	--	--	

Note: The weight in the table is that without drive unit. WF is wafer butterfly valve, and WL is lug wafer butterfly valve.

Main Outline Dimensions and Weight

Class 150mm

NPS	L	D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric			
				H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4
2	45	120.7	4-Φ 19	262	187	180	--	--	--	287	176	106	50	160	--	--	--	--
2½	48	139.7	4-Φ 19	267	193	200	--	--	--	294	179	140	63	160	--	--	--	--
3	49	152.4	4-Φ 19	295	218	250	--	--	--	320	185	140	63	160	513	263	178	180
4	54	190.5	8-Φ 19	329	239	270	--	--	--	342	195	140	63	160	535	282	178	180
5	57	215.8	8-Φ 22	369	261	300	--	--	--	365	209	140	63	300	563	293	178	180
6	58	241.3	8-Φ 22	398	275	350	--	--	--	415	243	140	63	300	602	322	178	180
8	64	298.5	8-Φ 22	--	--	--	690	323	275	510	263	150	84	400	745	296	235	370
10	71	362	12-Φ 22	--	--	--	750	355	275	567	295	150	84	400	805	325	235	370
12	81	431.8	12-Φ 25	--	--	--	955	475	378	665	342	200	108	600	883	365	235	370
14	92	476.3	12-Φ 29	--	--	--	1032	513	378	739	385	200	108	600	965	408	235	370
16	102	539.6	16-Φ 29	--	--	--	1182	598	530	825	430	240	152	600	1033	443	235	370
18	114	577.9	16-Φ 32	--	--	--	1265	635	530	910	469	240	152	800	1120	485	235	370
20	127	635	20-Φ 32	--	--	--	1335	667	530	990	500	300	168	800	1186	518	235	370
24	154	749.3	24-Φ 35	--	--	--	1642	830	680	1210	618	320	192	800	1380	625	235	370

Main Outline Dimensions and Weight

Class 300mm

NPS	L	D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric			
				H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4
2	45	127	8-Φ 19	262	179	230	--	--	--	287	176	106	50	160	--	--	--	--
2½	48	149.2	8-Φ 22	269	193	260	--	--	--	294	179	140	63	160	--	--	--	--
3	49	168.3	8-Φ 22	293	198	290	--	--	--	320	185	140	63	160	513	263	178	180
4	54	200	8-Φ 22	310	203	320	--	--	--	342	195	140	63	160	535	282	178	180
5	57	235	8-Φ 22	352	225	350	--	--	--	365	209	140	63	300	563	293	178	180
6	59	269.9	12-Φ 22	380	235	380	--	--	--	415	243	140	63	300	602	322	178	180
8	73	330.2	12-Φ 25	--	--	--	750	--	275	510	263	150	84	400	745	296	235	370
10	83	387.4	16-Φ 29	--	--	--	909	--	378	567	295	150	84	400	805	325	235	370
12	92	450.8	16-Φ 32	--	--	--	1075	--	530	665	342	200	108	600	883	365	235	370
14	117	514.4	20-Φ 32	--	--	--	1158	--	530	739	385	200	108	600	965	408	235	370
16	133	571.5	20-Φ 35	--	--	--	1230	--	530	825	430	240	152	600	1033	443	235	370
18	149	628.6	24-Φ 35	--	--	--	1462	--	680	910	469	240	152	800	1120	485	235	370
20	159	685.8	24-Φ 35	--	--	--	1328	--	680	990	500	300	168	800	1186	518	235	370
24	181	812.8	24-Φ 41	--	--	--	--	--	--	1210	618	320	192	800	1380	625	235	370

Main Outline Dimensions and Weight


Class 600mm

NPS	L	D1	z-Φd	Manual			Pneumatic			Worm gear actuation					Electric			
				H1	H01	B1	H2	H02	B2	H3	H03	B3	A3	D03	H4	H04	B4	A4
2	45	127	8-Φ 19	262	179	230	--	--	--	287	176	106	50	160	--	--	--	--
2½	48	149.2	8-Φ 22	269	193	260	--	--	--	294	179	140	63	160	--	--	--	--
3	64	168.3	8-Φ 22	293	198	290	--	--	--	320	185	140	63	160	513	263	178	180
4	64	215.9	8-Φ 25	310	203	320	--	--	--	342	195	140	63	160	535	282	178	180
5	70	266.7	8-Φ 28	352	225	350	--	--	--	365	209	140	63	300	563	293	178	180
6	78	292.1	12-Φ 28	380	235	380	--	--	--	415	243	140	63	300	602	322	178	180
8	102	349.2	12-Φ 32	--	--	--	750	368	275	510	263	150	84	400	745	296	235	370
10	117	431.8	16-Φ 35	--	--	--	909	442	378	567	295	150	84	400	805	325	235	370
12	140	489	20-Φ 35	--	--	--	1075	535	530	665	342	200	108	600	883	365	235	370
14	155	527	20-Φ 38	--	--	--	1158	572	530	739	385	200	108	600	965	408	235	370
16	178	603.2	20-Φ 41	--	--	--	1230	610	530	825	430	240	152	600	1033	443	235	370

Note: The weight in the table is that without drive unit. WF is wafer butterfly valve, and WL is lug wafer butterfly valve.

NPS	L	150LB-A Series		150LB-B Series		L	300LB-A Series		300LB-B Series	
		D1	z-Φd	D1	z-Φd		D1	z-Φd	D1	z-Φd
26	--	806.4	24-Φ 35	744.5	36-Φ 22	--	876.3	28-Φ 45	803.3	32-Φ 36
28	--	863.6	28-Φ 35	795.3	40-Φ 22	--	939.8	28-Φ 45	857.2	36-Φ 36
30	165	914.4	28-Φ 35	846.1	44-Φ 22	165	997	28-Φ 48	920.8	36-Φ 39
32	--	977.9	28-Φ 41	900.1	48-Φ 22	--	1054.1	28-Φ 51	977.9	32-Φ 42
34	--	1028.7	32-Φ 41	957.3	40-Φ 25	--	1104.9	28-Φ 51	1031.9	36-Φ 42
36	200	1085.8	32-Φ 41	1009.6	44-Φ 25	200	1168.4	32-Φ 54	1089	32-Φ 45
38	--	1149.4	32-Φ 41	1070	40-Φ 28	--	1092.2	32-Φ 42	1139.8	36-Φ 45
40	--	1200.2	36-Φ 41	1120.8	44-Φ 28	--	1155.7	32-Φ 45	1190.6	40-Φ 45
42	251	1257.3	36-Φ 41	1171.6	48-Φ 28	251	1206.5	32-Φ 45	1244.6	36-Φ 48
44	--	1314.4	40-Φ 41	1222.4	52-Φ 28	--	1263.6	32-Φ 48	1295.4	40-Φ 48
46	--	1365.2	40-Φ 41	1284.3	40-Φ 32	--	1320.8	28-Φ 51	1365.2	36-Φ 51
48	276	1422.4	44-Φ 41	1335.1	44-Φ 32	276	1371.6	32-Φ 51	1416	40-Φ 51
50	--	1479.6	44-Φ 48	1385.9	48-Φ 32	--	1428.8	32-Φ 54	1466.8	44-Φ 51
52	--	1536.7	44-Φ 48	1436.7	52-Φ 32	--	1479.6	32-Φ 54	1517.6	48-Φ 51
54	--	1593.8	44-Φ 48	1492.2	56-Φ 32	--	1549.4	28-Φ 61	1578	48-Φ 51
56	--	1651	48-Φ 48	1543	60-Φ 32	--	1600.2	28-Φ 61	1651	36-Φ 60
58	--	1708.2	48-Φ 48	1611.3	48-Φ 35	--	1651	32-Φ 61	1712.9	40-Φ 60
60	--	1759	52-Φ 48	1662.1	52-Φ 35	--	1701.8	32-Φ 61	1763.7	40-Φ 60

Dual-eccentric Flange Type Cast Structure Butterfly Valve

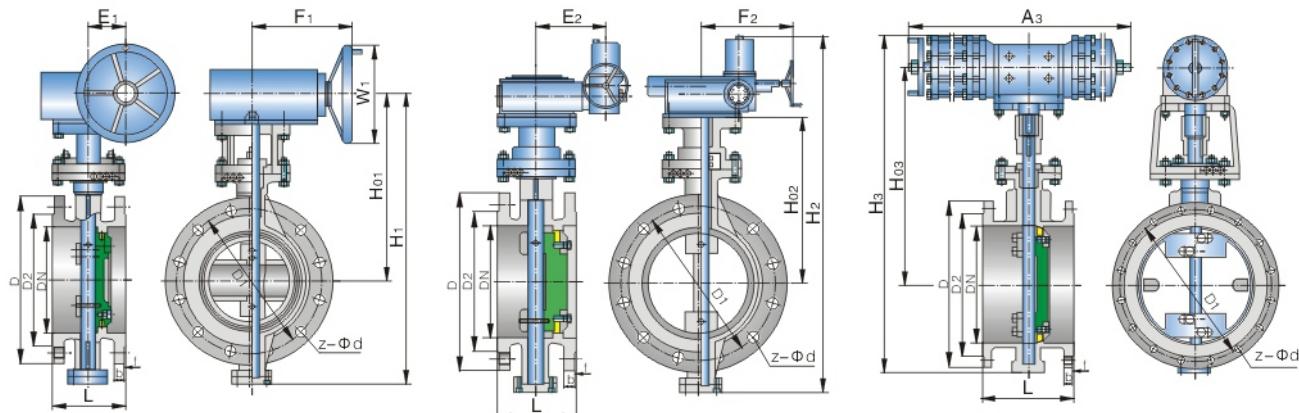

Worm Gear Flanged Butterfly Valve

Electric Flanged Butterfly Valve

Pneumatic Flanged Butterfly Valve

Main Dimension

DN	L		D	D1	D2	b	f	z-Φd	0.6MPa mm
	Series 1	Series 2							M
50	108	150	140	110	90	14	3	4-Φ 14	12
65	112	170	160	130	110	14	3	4-Φ 14	12
80	114	180	190	150	128	16	3	4-Φ 18	16
100	127	190	210	170	148	16	3	4-Φ 18	16
125	140	200	240	200	178	18	3	8-Φ 18	16
150	140	210	265	225	202	18	3	8-Φ 18	16
200	152	230	320	280	258	20	3	8-Φ 18	16
250	165	250	375	335	312	22	3	12-Φ 18	16
300	178	270	440	395	365	22	4	12-Φ 22	20
350	190	290	490	445	415	22	4	12-Φ 22	20
400	216	310	540	495	465	22	4	16-Φ 22	20
450	222	330	595	550	520	22	4	16-Φ 22	20
500	229	350	645	600	570	24	4	20-Φ 22	20
600	267	390	755	705	670	30	5	20-Φ 22	24
700	292	430	860	810	775	30(26)	5	24-Φ 26	24
800	318	470	975	920	880	30(26)	5	24-Φ 30	27
900	330	510	1075	1020	980	34(26)	5	24-Φ 30	27
1000	410	550	1175	1120	1080	38(26)	5	28-Φ 30	27
1200	470	630	1405	1340	1295	42(28)	5	32-Φ 33	30
1400	530	710	1630	1560	1510	56(32)	5	36-Φ 36	33
1600	600	790	1830	1760	1710	63(34)	5	40-Φ 36	33
1800	670	870	2045	1970	1920	69(36)	5	44-Φ 39	36

Main Outline Dimensions and Weight

0.6MPa mm

DN	L*	Worm gear actuation					Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	Warm gear	Electric	Pneumatic
50	108	267	172	63	140	180	--	--	--	--	--	--	--	12	42	--
65	112	290	180	63	140	180	--	--	--	--	--	--	--	13	47	--
80	114	320	190	63	140	180	320	185	178	180	--	--	--	14	50	--
100	127	342	198	63	140	240	340	198	178	180	--	--	--	17	60	--
125	140	380	223	63	140	240	380	223	178	180	--	--	--	27	80	--
150	140	415	246	63	140	300	415	241	178	180	--	--	--	29	110	--
200	152	470	298	84	170	300	512	263	235	370	695	325	275	45	130	--
250	165	535	328	84	170	400	570	292	235	370	750	355	275	69	170	--
300	178	606	365	108	200	400	668	340	235	370	935	475	378	86	200	--
350	190	695	408	108	200	400	745	385	235	370	1000	510	378	122	280	--
400	216	755	446	128	240	600	827	425	235	370	1145	590	378	141	320	--
450	222	815	475	152	240	600	915	462	235	370	1205	632	530	191	395	--
500	229	905	525	168	300	600	995	500	235	370	1256	665	530	260	500	--
600	267	1050	610	320	192	350	1183	605	245	515	1526	830	530	380	600	--
700	292	1276	795	237	192	350	1460	734	245	515	1640	903	530	450	800	--
800	318	1384	837	237	168	350	1589	803	245	515	1786	972	680	650	890	--
900	330	1500	885	237	168	450	1856	990	360	540	1917	1052	680	830	1040	--
1000	410	1620	946	785	330	450	1958	1050	360	540	2600	1170	680	1050	1400	--
1200	470	2185	1165	785	330	450	2013	1165	360	540	--	--	--	1400	1850	--
1400	530	2315	1310	785	330	450	2186	1312	360	540	--	--	--	1900	2664	--
1600	600	2675	1440	865	330	600	2531	1438	385	565	--	--	--	2900	3450	--
1800	670	2920	1580	865	550	600	2795	1580	385	565	--	--	--	4000	4450	--
2000	950	3170	1725	865	550	600	3055	1726	300	770	--	--	--	5300	5900	--
2200	1000	3415	1845	865	650	600	3269	1824	520	817	--	--	--	6700	--	--
2400	1110	3670	1972	865	650	600	3524	1959	520	817	--	--	--	7500	--	--
2600	1190	3830	2100	865	650	600	3765	2080	450	973	--	--	--	--	--	--
2800	1270	4100	2235	865	850	600	4025	2210	450	973	--	--	--	--	--	--
3000	1350	4380	2370	865	850	600	4278	2390	450	973	--	--	--	--	--	--

Note: * Structural length of valves in the table: DN<2000 to ISO5752 13 series; DN>2000, to ISO5752 14 series.

1.0MPa mm

DN	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
50	108	150	165	125	102	18	3	4-Φ 18	16
65	112	170	185	145	122	18	3	8-Φ 18	16
80	114	180	200	160	138	20	3	8-Φ 18	16
100	127	190	220	180	158	20	3	8-Φ 18	16
125	140	200	250	210	188	22	3	8-Φ 18	16
150	140	210	285	240	212	22	3	8-Φ 22	20
200	152	230	340	295	268	24	3	8-Φ 22	20
250	165	250	395	350	320	26	3	12-Φ 22	20
300	178	270	445	400	370	26	4	12-Φ 22	20
350	190	290	505	460	430	26	4	16-Φ 22	20
400	216	310	565	515	482	26	4	16-Φ 26	24
450	222	330	615	565	532	28	4	20-Φ 26	24
500	229	350	670	620	585	28	4	20-Φ 26	24
600	267	390	780	725	685	30(34)	5	20-Φ 30	27
700	292	430	895	840	800	35(34)	5	24-Φ 30	27
800	318	470	1015	950	905	38(36)	5	24-Φ 33	30
900	330	510	1115	1050	1005	38(38)	5	28-Φ 33	30
1000	410	550	1230	1160	1110	44(38)	5	28-Φ 36	33
1200	470	630	1455	1380	1330	55(44)	5	32-Φ 39	36
1400	530	710	1675	1590	1535	65(48)	5	36-Φ 42	39
1600	600	790	1915	1820	1760	75(52)	5	40-Φ 48	45
1800	670	870	2115	2020	1960	85(56)	5	44-Φ 48	45

Main Outline Dimensions and Weight

DN	L*	Worm gear actuation					Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	Warm gear	Electric	Pneumatic
50	108	267	172	63	140	180	--	--	--	--	--	--	--	12	42	--
65	112	290	178	63	140	180	--	--	--	--	--	--	--	13	47	--
80	114	325	185	63	140	180	320	185	180	178	--	--	--	14	50	--
100	127	345	193	63	140	240	340	198	180	178	--	--	--	17	60	--
125	140	380	219	63	140	240	382	220	180	178	--	--	--	27	80	--
150	140	415	245	63	140	240	415	241	180	178	--	--	--	29	110	--
200	152	470	298	84	170	300	512	263	370	235	740	367	275	45	130	--
250	165	535	328	84	170	300	570	292	370	235	900	443	378	69	190	--
300	178	606	365	108	200	400	668	340	370	235	990	493	378	86	210	--
350	190	695	408	108	200	400	745	385	370	235	1155	575	378	122	310	--
400	216	755	446	128	240	400	827	425	370	235	1205	600	530	141	380	--
450	222	815	475	152	240	600	915	462	370	235	1290	643	530	191	460	--
500	229	905	525	168	300	600	995	500	370	235	1395	705	530	260	580	--
600	267	1050	610	320	192	600	1183	605	515	245	1665	838	530	380	690	--
700	292	1276	795	237	192	350	1460	734	515	245	1882	942	680	450	850	--
800	318	1384	837	237	168	350	1589	803	515	245	2093	1066	680	650	1000	--
900	330	1500	885	237	168	350	1856	990	540	360	--	--	--	830	1220	--
1000	410	1620	946	785	330	450	1958	1050	540	360	--	--	--	1050	1600	--
1200	470	2185	1165	785	330	450	2013	1165	540	360	--	--	--	1400	2150	--
1400	530	2315	1310	785	330	450	2186	1312	540	360	--	--	--	1900	2610	--
1600	600	2675	1440	785	330	450	2531	1438	565	385	--	--	--	2900	3450	--
1800	670	2920	1580	865	550	600	2795	1580	565	385	--	--	--	4000	4900	--
2000	950	3170	1725	865	550	600	3055	1726	770	300	--	--	--	5300	5900	--
2200	1000	3340	1935	440	650	800	3365	1980	973	450	--	--	--	8368	--	--
2400	1110	3625	2110	440	650	800	3655	2140	973	450	--	--	--	11792	--	--

Note: * Structural length of valves in the table: DN<2000 to ISO5752 13 series: DN>2000, to ISO5752 14 series.

Main Dimensions

DN	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
50	108	150	165	125	102	18	3	4-Φ 18	16
65	112	170	185	145	122	18	3	8-Φ 18	16
80	114	180	200	160	138	20	3	8-Φ 18	16
100	127	190	220	180	158	20	3	8-Φ 18	16
125	140	200	250	210	188	22	3	8-Φ 18	16
150	140	210	285	240	212	22	3	8-Φ 22	20
200	152	230	340	295	268	24	3	12-Φ 22	20
250	165	250	405	355	320	26	3	12-Φ 26	24
300	178	270	460	410	378	28	4	12-Φ 26	24
350	190	290	520	470	428	30	4	16-Φ 26	24
400	216	310	580	525	490	32	4	16-Φ 26	27
450	222	330	640	585	550	34(40)	4	20-Φ 30	27
500	229	350	715	650	610	36(44)	4	20-Φ 33	30
600	267	390	840	770	725	40(54)	5	20-Φ 36	33
700	292	430	910	840	795	40(40)	5	24-Φ 36	33
800	318	470	1025	950	900	41(42)	5	24-Φ 39	36
900	330	510	1125	1050	1000	48(44)	5	28-Φ 39	36
1000	410	550	1255	1170	1115	59(46)	5	28-Φ 42	39
1200	470	630	1485	1390	1330	78(52)	5	32-Φ 48	45
1400	530	710	1685	1590	1530	84(58)	5	36-Φ 48	45
1600	600	790	1930	1820	1750	102(64)	5	40-Φ 56	52
1800	670	870	2130	2020	1950	110(68)	5	44-Φ 56	52

1.6MPa mm																
DN	L*	Worm gear actuation					Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	Worm gear	Electric	Pneumatic
50	108	267	172	63	140	180	--	--	--	--	--	--	--	--	--	--
65	112	290	175	63	140	1160	--	--	--	--	--	--	--	--	--	--
80	114	320	185	63	140	160	513	265	180	178	--	--	--	--	--	--
100	127	342	195	63	140	160	538	282	180	178	--	--	--	--	--	--
125	140	365	209	63	140	300	560	295	180	178	--	--	--	--	--	--
150	140	415	243	63	140	300	605	300	180	178	--	--	--	45	105	--
200	152	510	263	84	150	400	749	321	370	235	695	327	275	60	135	--
250	165	567	295	84	150	400	803	330	370	235	750	355	275	75	150	--
300	178	665	342	108	200	600	880	365	370	235	955	472	378	110	260	--
350	190	739	385	108	200	600	960	410	370	235	1033	515	378	160	325	--
400	216	825	430	152	240	600	1032	445	370	235	1185	595	530	210	405	--
450	222	910	469	152	240	800	1118	487	370	235	1270	632	530	241	490	--
500	229	990	500	168	300	800	1190	520	370	235	1335	665	530	350	700	--
600	267	1210	618	192	320	800	1380	625	370	235	1642	829	680	510	855	--
700	292	1475	746	238	237	400	1582	745	515	245	1785	905	680	730	1150	--
800	318	1600	810	238	237	400	1713	810	515	245	1915	970	680	1030	1370	--
900	330	1870	1000	330	785	400	1870	875	540	360	--	--	--	1240	1610	--
1000	410	2000	1065	430	785	600	2000	940	540	360	--	--	--	1560	1920	--
1200	470	2215	1170	430	785	600	2118	1060	540	360	--	--	--	2260	2510	--
1400	530	2430	1319	550	865	800	2328	1325	565	385	--	--	--	2610	3000	--
1600	600	2700	1443	550	865	800	2550	1450	565	385	--	--	--	3050	4700	--
1800	670	2938	1595	650	865	800	2816	1598	770	300	--	--	--	5725	6500	--
2000	950	3210	1743	650	865	800	3065	1743	794	684	--	--	--	8040	8700	--

Note: * Structural length of valves in the table: DN<2000 to ISO5752 13 series: DN>2000, to ISO5752 14 series.

2.5MPa mm											
DN	L		D	D1		D2		b	f	z-Φd	M
	Series 1	Series 2		D1	D2	b	f				
50	108	150	165	125	102	20	3	4-Φ 18	16		
65	112	170	185	145	122	22	3	8-Φ 18	16		
80	114	180	200	160	138	24	3	8-Φ 18	16		
100	127	190	235	190	162	25	3	8-Φ 22	20		
125	140	200	270	220	188	26	3	8-Φ 26	24		
150	140	210	300	250	218	28	3	8-Φ 26	24		
200	152	230	360	310	278	30	3	12-Φ 26	24		
250	165	250	425	370	335	32	3	12-Φ 30	27		
300	178	270	485	430	395	34	4	16-Φ 30	27		
350	190	290	555	490	450	38	4	16-Φ 33	30		
400	216	310	620	550	505	40	4	16-Φ 36	33		
450	222	330	670	600	555	46	4	20-Φ 36	33		
500	229	350	730	660	615	48	4	20-Φ 36	33		
600	267	390	845	770	720	48(58)	5	20-Φ 39	36		
700	292	430	960	875	820	50	5	24-Φ 42	39		
800	318	470	1085	990	930	53(54)	5	24-Φ 48	45		
900	330	510	1185	1090	1030	57(58)	5	28-Φ 48	45		
1000	410	550	1320	1210	1140	63(62)	5	28-Φ 56	52		
1200	470	630	1530	1420	1350	70	5	32-Φ 56	52		
1400	530	710	1755	1640	1560	76	5	36-Φ 62	56		
1600	600	790	1975	1860	1780	84	5	40-Φ 62	56		
1800	670	870	2195	2070	1985	90	5	44-Φ 70	64		

Main Outline Dimensions and Weight

DN	L*	Worm gear actuation					Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	Warm gear	Electric	Pneumatic
50	108	320	185	63	140	160	--	--	--	--	--	--	--	--	--	--
65	112	350	200	63	140	300	--	--	--	--	--	--	--	--	--	--
80	114	395	245	63	140	300	530	240	180	178	--	--	--	--	--	--
100	127	356	205	63	140	400	555	205	180	178	--	--	--	26	76	--
125	140	375	213	63	140	400	582	215	180	178	--	--	--	43	100	--
150	140	439	260	84	150	600	609	260	370	235	--	--	--	64	160	--
200	152	520	275	84	150	600	755	275	370	235	750	375	275	74	225	--
250	165	600	315	108	200	600	818	315	370	235	905	445	378	119	338	--
300	178	692	365	108	200	800	912	363	515	245	1085	538	503	165	399	--
350	190	776	408	152	240	800	983	406	515	245	1160	576	503	259	553	--
400	216	864	443	168	300	800	1058	440	515	245	1230	609	503	325	644	--
450	222	925	525	237	368	400	1111	571	515	245	1375	665	680	366	885	--
500	229	1128	571	237	368	400	1245	600	540	360	1520	765	680	444	1149	--
600	267	1257	664	237	368	400	1336	663	540	360	--	--	--	--	--	--
700	292	1450	880	410	550	600	1414	796	730	410	--	--	--	--	--	--
800	318	1555	905	410	550	600	1451	851	730	410	--	--	--	--	--	--

Note: * Structural length to ISO5752 13 series

Main Dimensions

Class 150 mm

NPS	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
2	108	150	150	120.7	92.1	19.5	2	4-Φ 19	5/8
2½	112	170	180	139.7	104.8	22.7	2	4-Φ 19	5/8
3	114	180	190	152.4	127	24.3	2	4-Φ 19	5/8
4	127	190	230	190.5	157.2	24.3	2	8-Φ 19	5/8
5	140	200	255	215.9	185.7	24.3	2	8-Φ 22	3/4
6	140	210	280	241.3	215.9	25.9	2	8-Φ 22	3/4
8	152	230	345	298.5	269.9	29	2	8-Φ 22	3/4
10	165	250	405	362	323.8	30.6	2	12-Φ 25	7/8
12	178	270	485	431.8	381	32.2	2	12-Φ 25	7/8
14	190	290	535	476.3	412.8	35.4	2	12-Φ 29	1
16	216	310	595	539.8	469.9	37	2	16-Φ 29	1
18	222	330	635	577.9	533.4	40.1	2	16-Φ 32	1 1/8
20	229	350	700	635	584.2	43.3	2	20-Φ 32	1 1/8
24	267	390	815	749.3	692.2	48.1	2	20-Φ 35	1 1/4

Main Dimensions

Class 150LB-A Series

NPS	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
26	--	--	870	806.4	749	68.7	2	24-Φ 35	1 1/4
28	292	430	925	863.6	800	71.9	2	28-Φ 35	1 1/4
30	--	--	985	914.4	857	75.1	2	28-Φ 35	1 1/4
32	318	470	1060	977.9	914	81.4	2	28-Φ 41	1 1/2
34	--	--	1110	1028.7	965	83	2	32-Φ 41	1 1/2
36	330	510	1170	1085.8	1022	90.9	2	32-Φ 41	1 1/2
38	--	--	1240	1149.4	1073	87.8	2	32-Φ 41	1 1/2
40	410	550	1290	1200.2	1124	90.9	2	36-Φ 41	1 1/2
42	--	--	1345	1257.3	1194	97.3	2	36-Φ 41	1 1/2
44	--	--	1405	1314.4	1245	102.1	2	40-Φ 41	1 1/2
46	--	--	1455	1365.2	1295	103.6	2	40-Φ 41	1 1/2
48	470	630	1510	1422.4	1359	108.4	2	44-Φ 41	1 1/2
50	--	--	1570	1479.6	1410	111.6	2	44-Φ 48	1 3/4
52	--	--	1625	1536.7	1461	116.3	2	44-Φ 48	1 3/4
54	--	--	1685	1593.8	1511	121.1	2	44-Φ 48	1 3/4
56	530	710	1745	1651	1575	124.3	2	48-Φ 48	1 3/4
58	--	--	1805	1708.2	1626	129	2	48-Φ 48	1 3/4
60	--	--	1855	1759	1676	132.2	2	52-Φ 48	1 3/4

Main Dimensions

Class 150LB-B Series mm

NPS	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
26	--	--	785	744.5	711	41.8	2	36-Φ 22	3/4
28	292	430	835	795.3	762	45	2	40-Φ 22	3/4
30	--	--	885	846.1	813	45	2	44-Φ 22	3/4
32	318	470	940	900.1	864	46.6	2	48-Φ 22	3/4
34	--	--	1005	957.3	921	49.7	2	40-Φ 25	7/8
36	330	510	1055	1009.6	972	52.9	2	44-Φ 25	7/8
38	--	--	1125	1070	1022	54.5	2	40-Φ 28	1
40	410	550	1175	1120.8	1080	56.1	2	44-Φ 28	1
42	--	--	1225	1171.6	1130	59.3	2	48-Φ 28	1
44	--	--	1275	1222.4	1181	60.9	2	52-Φ 28	1
46	--	--	1340	1284.3	1235	62.4	2	40-Φ 32	1 1/8
48	470	630	1390	1335.1	1289	65.5	2	44-Φ 32	1 1/8
50	--	--	1445	1385.9	1340	68.8	2	48-Φ 32	1 1/8
52	--	--	1495	1436.7	1391	70.4	2	52-Φ 32	1 1/8
54	--	--	1550	1492.2	1441	72	2	56-Φ 32	1 1/8
56	530	710	1600	1543	1492	73.6	2	60-Φ 32	1 1/8
58	--	--	1675	1611.3	1543	75.1	2	48-Φ 35	1 1/4
60	--	--	1725	1662.1	1600	76.7	2	52-Φ 35	1 1/4

Main Dimensions

NPS	L		D	D1	D2	b	f	Class 300LB-B Series mm	
	Series 1	Series 2						M	
26	--	--	865	803.3	737	89.4	2	32-Φ 36	1 1/4
28	292	430	920	857.2	787	89.4	2	36-Φ 36	1 1/4
30	--	--	990	920.8	845	91.4	2	36-Φ 39	1 3/8
32	318	470	1055	977.9	902	103.6	2	32-Φ 42	1 1/2
34	--	--	1110	1031.9	953	103.6	2	36-Φ 42	1 1/2
36	330	510	1170	1089	1010	103.6	2	32-Φ 45	1 5/8
38	--	--	1220	1139.8	1060	111.6	2	36-Φ 45	1 5/8
40	410	550	1275	1190.6	1114	116.3	2	40-Φ 45	1 5/8
42	--	--	1335	1244.6	1168	119.5	2	36-Φ 48	1 3/4
44	--	--	1385	1295.4	1219	127.5	2	40-Φ 48	1 3/4
46	--	--	1460	1365.2	1270	129	2	36-Φ 51	1 7/8
48	470	630	1510	1416	1327	129	2	40-Φ 51	1 7/8
50	--	--	1560	1466.8	1378	138.6	2	44-Φ 51	1 7/8
52	--	--	1615	1517.6	1429	143.3	2	48-Φ 51	1 7/8
54	--	--	1675	1578	1480	137	2	48-Φ 51	1 7/8
56	530	710	1765	1651	1537	154.4	2	36-Φ 60	2 1/4
58	--	--	1825	1712.9	1594	154.4	2	40-Φ 60	2 1/4
60	--	--	1880	1763.7	1651	151.3	2	40-Φ 60	2 1/4

Main Outline Dimensions and Weight

NPS	L*	Worm gear actuation				Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	H2	H02	E2	F2	H3	H03	A3	Warm gear	Electric	Pneumatic
3	180	395	241	63	63	530	242	180	178	--	--	--	29	64	--
4	190	355	205	63	63	552	204	180	178	--	--	--	39	76	--
5	200	378	215	63	63	580	214	180	178	--	--	--	48	87	--
6	210	430	260	84	84	610	259	180	178	--	--	--	54	100	--
8	230	523	273	84	84	755	310	370	235	750	368	275	84	160	--
10	250	600	315	108	108	816	340	370	235	909	442	378	118	225	--
12	270	693	362	108	108	912	390	370	235	1075	535	530	170	338	--
14	290	772	405	152	152	980	425	370	235	1158	572	530	231	399	--
16	310	862	440	168	168	1057	460	370	235	1230	610	530	299	553	--
18	330	960	525	192	192	1140	525	370	235	1462	736	680	390	644	--
20	350	1158	603	237	237	1243	556	515	245	1328	765	680	499	885	--
24	390	1320	693	237	237	1420	653	817	351	--	--	--	726	1149	--

Note: * Structural length to ISO5752 14 series

Class 600 mm

NPS	L		D	D1	D2	b	f	z-Φd	M
	Series 1	Series 2							
2	108	150	165	127	92.1	32.4	7	8-Φ 19	5/8
2½	112	170	190	149.2	104.8	35.6	7	8-Φ 22	3/4
3	114	180	210	168.3	127	38.8	7	8-Φ 22	3/4
4	127	190	275	215.9	157.2	45.1	7	8-Φ 25	7/8
5	140	200	330	266.7	185.7	51.5	7	8-Φ 28	1
6	140	210	355	292.1	215.9	54.7	7	12-Φ 28	1
8	152	230	420	349.2	269.9	62.6	7	12-Φ 32	1 1/8
10	165	250	510	431.8	323.8	70.5	7	16-Φ 35	1 1/4
12	178	270	560	489	381	73.7	7	20-Φ 35	1 1/4
14	190	290	605	527	412.8	76.9	7	20-Φ 38	1 3/8
16	216	310	685	603.2	469.9	83.2	7	20-Φ 41	1 1/2
18	222	330	745	654	533.4	89.6	7	20-Φ 44	1 5/8
20	229	350	815	723.9	584.2	95.9	7	24-Φ 44	1 5/8
24	267	390	940	838.2	692.2	108.6	7	24-Φ 51	1 7/8


Class 600 mm

NPS	L*	Worm gear actuation				Electric				Pneumatic			Weight(kg)		
		H1	H01	E1	F1	H2	H02	E2	F2	H3	H03	A3	Worm gear	Electric	Pneumatic
3	180	500	250	63	63	606	295	180	178	--	--	--	82	79	--
4	190	595	340	63	63	650	358	180	178	--	--	--	125	96	--
5	200	680	395	108	108	695	371	180	178	--	--	--	165	154	--
6	210	730	423	152	152	713	387	180	178	--	--	--	191	172	--
8	230	855	445	168	168	1055	417	370	235	--	--	--	247	248	--
10	250	1002	536	192	192	1172	465	370	235	--	--	--	413	308	--
12	270	1150	614	237	237	1392	546	515	245	--	--	--	576	467	--
14	290	1200	674	237	237	1475	579	515	245	--	--	--	664	585	--
16	310	1345	823	237	237	1557	643	540	360	--	--	--	971	807	--
18	330	1397	841	269	269	1625	673	540	360	--	--	--	1117	1003	--
20	350	1430	978	350	350	1679	701	540	360	--	--	--	1639	1139	--
24	390	1582	1069	350	350	1834	775	540	360	--	--	--	2082	1767	--

Note: * Structural length to ISO5752 14 series

Design Characteristics of Triple Eccentric Butterfly Valve

The Triple Eccentric Geometry

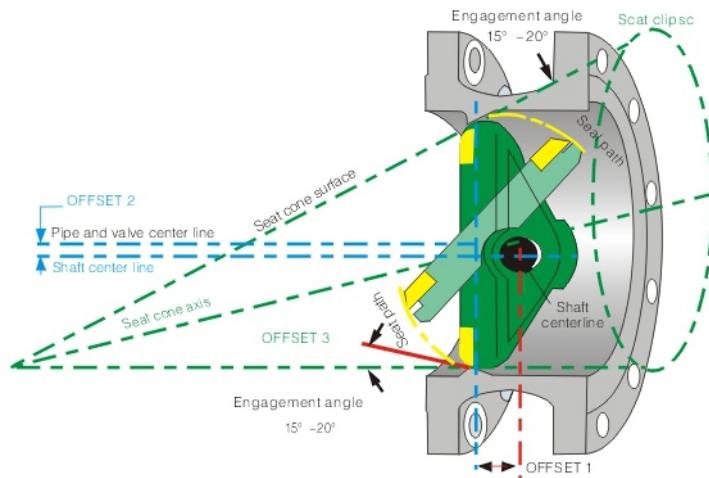


The first eccentric, shaft deviated from the centerline of sealing face.

The second eccentric, shaft deviated from the centerline of pipe and valve.

The third eccentric, the distinctive included angle between oblique taper angle of eccentric seat and centerline of pipe, thus making the seat completely disengaged from the sealing ring during the whole process of open and close. This structure not only uses cam effect, but also eliminates the possibility of abrasion and leakage.


The zero leakage of our triple eccentric butterfly valve is implemented by the composite stainless steel sealing ring mounted on the disc. Zero leakage is implemented by the elastic sealing ring mounted on the disc. The elasticity of sealing ring (see fig.) is produced by its radial compression and flexibility. The contact surface between the sealing ring and seat is an oblique cone. The contact angle between them gives slight 'wedge effect', making the sealing ring producing flexibility and radial compression. The even contact between the seat and sealing ring, and the elasticity of sealing ring makes the load on the seat even, thus to perform closest cutoff by the lowest torque. The elasticity produced by the torque makes the valve closely cut off, regardless of the flow direction or pressure of medium.

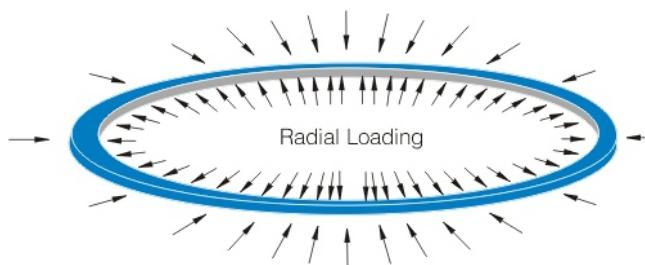

Characteristic

- Elastic property of composite metal sealing ring to perform zero leakage.
- Torque seal to ensure persistent two-way zero leakage.
- The design of right-angled rotation with zero friction is implemented by the distinctive triple eccentric principal. It eliminates the friction between the seat and sealing ring in 90° rotation.
- STL one-piece hard-surface seat may adapt to many working conditions, which is featured by long service life and easy maintenance.
- One-piece cast (sheet welded) body, face-to-face dimensions conforming to ISO5752, ASME B16.10 nad API609, replacement to high performance butterfly valves and other types of valves, easy and flexible installation.
- Intrinsically fireproof property thanks to all metal structure and leak-tight performance.
- Anti-blowout stem for high dependability, completely conforming to API609.
- The valve position indicator on the stem and the flange mounted at the top are in favor of the indication of disc position.
- The stem of triple eccentric butterfly valve is a shaft, stem, and disc are connected by key or pin-key combination.

Triple Eccentric Butterfly Valve Structural Drawing

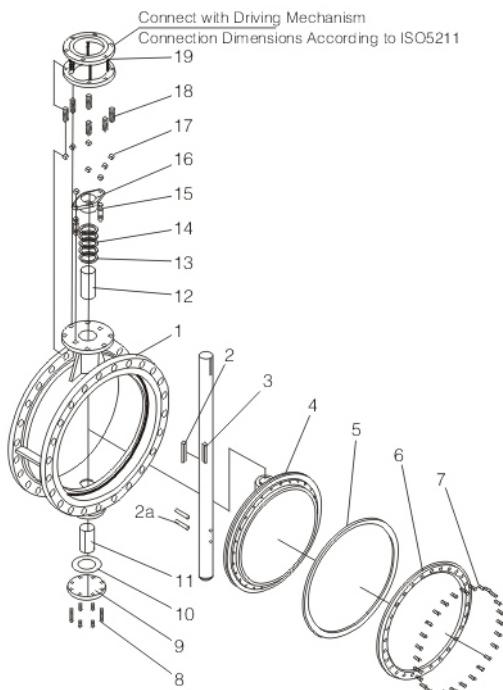

Materials List (Triple Eccentric Butterfly Valve)


No	Part Name	Material	Optional Materials
1	Body	Cast Steel	SS, Monel
2	Key	SS	SS, Monel
2a	Pin	SS	Monel
3	Stem	SS	316, Monel
4	Disc	Cast Steel	SS, Monel
5	Seal Ring	PTFE+SS	SS+Graphite
6	Retainer Flange	Carbon Steel	SS, Monel
7	Bolt	B7	SS
8	Bolt	B7	SS
9	Cover	Carbon Steel	SS, Monel
10	Gasket	Graphite	Graphite
11	Bushing	PTFE+Bronze	Graphite
12	Bushing	PTFE+Bronze	Luberized Bronze
13	Packing Seat	SS	Luberized Bronze
14	Packing	Graphite	SS, Monel
15	Bolt	B7	PTFE
16	Packing Bushing	SS	SS
17	Nut	2H	SS
18	Bolt	B7	SS
19	Yoke	Carbon Steel	--

Type of Body Connection


The connection between triple eccentric valve body and pipe can be double flanged, wafer and lug wafer

Reference Moment Diagram of Triple Eccentric Butterfly Valve


The following graphic torque is used for reference to choose the actuators of ANSI valves. According to the property of medium, trims and open-close frequency of valve shall be considered as extra factors.

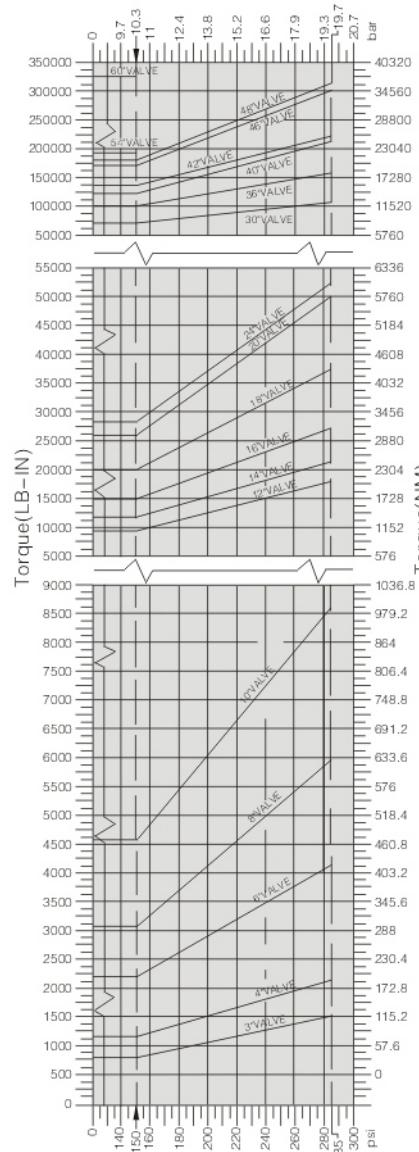

Class150

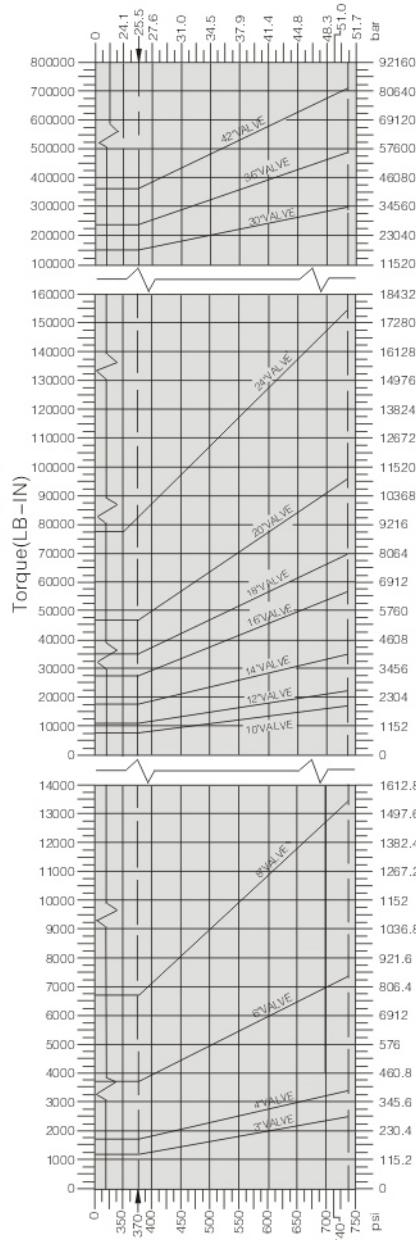

Class300

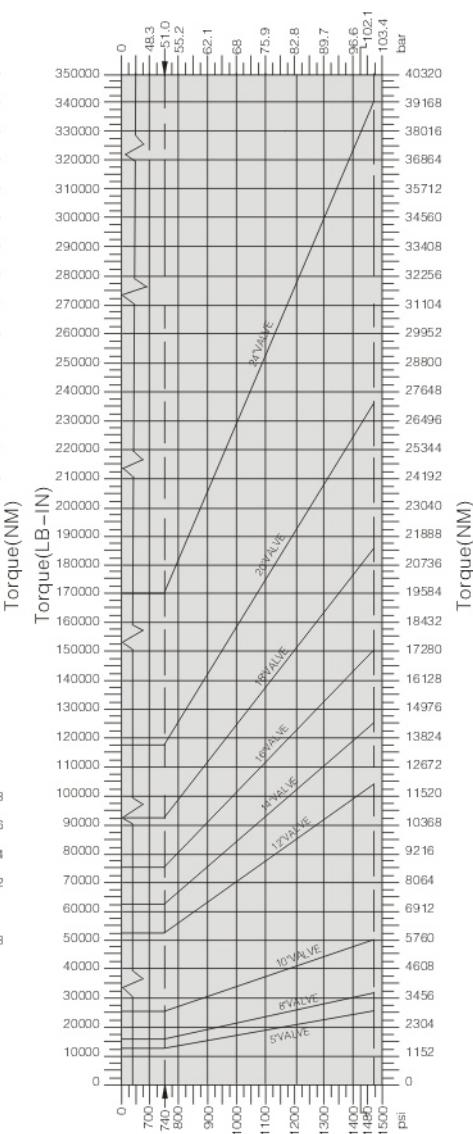

Class600

Triple Eccentric Butterfly Valve Torques (NM)

Size (mm)		Pressure									
DN	NPS	PN0.6MPa	PN1.0MPa	PN1.6MPa	PN2.5MPa	PN4.0MPa	PN6.3MPa	285PSI	740PSI	1480PSI	
50	2"	--	--	37	--	--	--	--	--	--	
65	2 1/2"	29	35	60	82	106	142	69	123	213	
80	3"	34	57	81	102	148	290	174	271	460	
100	4"	61	102	141	180	259	526	250	395	834	
125	5"	104	165	228	289	412	641	283	548	979	
150	6"	178	250	450	564	790	1060	473	825	2938	
200	8"	201	400	601	800	1201	1567	674	1503	3616	
250	10"	353	518	956	1250	1862	2697	983	1887	5649	
300	12"	635	992	1352	1711	2428	3149	2022	2508	11863	
350	14"	819	1623	2234	2844	4067	4855	2520	4158	14123	
400	16"	1047	1944	2842	3738	5533	6473	3175	6271	17061	
450	18"	1451	2451	3452	4412	6454	--	4239	7864	21015	
500	20"	2043	3285	4527	5769	8253	--	5531	10361	26551	
600	24"	2779	5548	6018	9495	13443	--	6011	17559	38415	
700	28"	--	--	6890	--	--	--	--	--	--	
750	30"	3230	6723	7700	16552	--	--	12654	33105	--	
800	32"	--	--	8760	--	--	--	--	--	--	
900	36"	5275	8474	9750	26438	--	--	18078	52877	--	
1000	40"	6915	11717	13560	--	--	--	24179	--	--	
1050	42"	8135	15253	16270	40110	34000	--	24857	80219	--	
1200	48"	12540	20563	22360	38900	41900	--	36155	--	--	
1350	54"	18300	21806	29977	--	--	--	--	--	--	
1400	56"	24650	--	34900	--	--	--	--	--	--	
1500	60"	26440	36155	43397	--	--	--	--	--	--	
1600	64"	40850	--	48600	--	--	--	--	--	--	
1800	72"	--	--	--	--	--	--	--	--	--	
2000	80"	--	--	--	--	--	--	--	--	--	
2200	88"	--	--	--	--	--	--	--	--	--	
2400	96"	--	--	--	--	--	--	--	--	--	
2600	104"	--	--	--	--	--	--	--	--	--	
2800	112"	--	--	--	--	--	--	--	--	--	
3000	120"	--	--	--	--	--	--	--	--	--	

Flow Coefficients (Cv Values)


Flow coefficient is an index to measure the flow capacity of a valve. A higher value of flow coefficient means less pressure loss of fluid passing through the valve. The value of flow coefficient varies according to the dimensions, type and structure of valve. Valves of different types and specifications shall be tested separately to make sure of their values of flow coefficient. Regarding valves of the same structure, flow coefficient varies according to the flow direction of fluid through the valve. Generally, these differences are caused by different pressure recoveries.

The table below is the flow coefficient of double eccentric butterfly valve. used for reference to choose valve flow coefficient. 'Cv' stand for the American gallons flowing through the valve per minute under 1 pound/inch² (0.006894757MPa) pressure drop +60° F(+16° C) water.

Cv Values

Size (mm)		Pressure								
DN	NPS	PN0.6MPa	PN1.0MPa	PN1.6MPa	PN2.5MPa	PN4.0MPa	PN6.3MPa	Class150	Class300	Class600
50	2"	100	100	100	93	93	52	93	93	52
65	2½"	133	133	133	133	133	78	133	133	78
80	3"	165	165	165	120	120	120	188	188	120
100	4"	400	400	400	230	230	230	343	343	228
125	5"	510	510	510	400	400	400	400	400	346
150	6"	1050	1050	1050	660	660	660	930	868	744
200	8"	2200	2200	2200	1500	1500	1500	1812	1678	1450
250	10"	3300	3300	3300	2400	2400	2400	2750	2500	2125
300	12"	5100	5100	5100	3600	3600	3600	3900	3510	2730
350	14"	5800	5800	5800	5500	5500	5500	5515	4942	4217
400	16"	9287	9287	9287	7600	7600	7600	8440	7596	6487
450	18"	11400	11400	11400	10300	10300	10300	11285	10394	8874
500	20"	14000	14000	14000	13000	13000	13000	14092	12965	11071
600	24"	21600	21600	21600	20200	20200	20200	20587	18962	16188
700	28"	30000	30000	30000	--	--	--	--	--	--
750	30"	34000	34000	34000	28245	28245	28245	33700	29600	--
800	32"	41000	41000	41000	--	--	--	--	--	--
900	36"	55500	55500	55500	47160	47160	47160	50470	42700	--
1000	40"	80000	80000	80000	--	--	--	64000	--	--
1050	42"	--	--	--	64190	64190	64190	71100	58100	--
1200	48"	--	--	--	83840	83840	83840	95740	--	--
1350	54"	--	--	--	--	--	--	120750	--	--
1400	56"	--	--	--	--	--	--	--	--	--
1500	60"	--	--	--	--	--	--	147000	--	--

Triple Eccentric Wafer Butterfly Valve

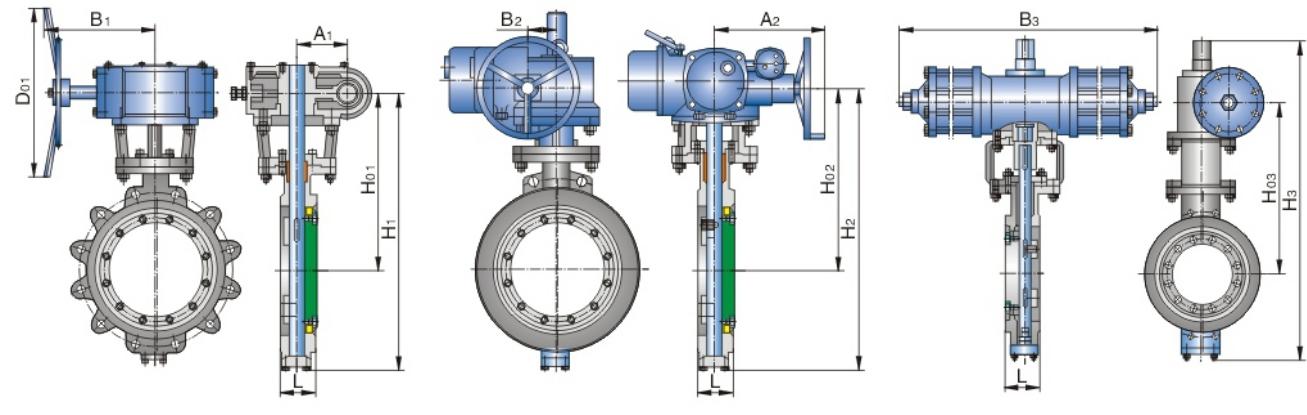

Worm Gear Lug Wafer Butterfly Valve

Electric Wafer Butterfly Valve


Pneumatic Wafer Butterfly Valve

Main Outline Dimensions and Weight



0.6MPa mm

DN	L		Pneumatic			Worm gear actuation					Electric				Weight (kg)	
	Series 1	Series 2	H3	H03	B3	H1	H01	B1	A1	D01	H2	H02	B2	A2	WF	WL
50	43	43	--	--	--	266	143	106	50	160	--	--	--	--	4.5	5.5
65	46	46	--	--	--	290	178	140	63	180	--	--	--	--	5	7
80	49	54	--	--	--	320	185	140	63	180	320	185	178	180	9	9
100	56	64	--	--	--	342	193	140	63	240	340	198	178	180	11	14
125	64	70	--	--	--	378	219	140	63	240	340	205	178	180	--	--
150	70	76	--	--	--	415	246	140	63	240	415	241	178	180	17	20
200	71	89	695	325	275	470	298	170	84	300	512	263	235	370	25	31
250	76	114	750	355	275	535	328	170	84	300	570	292	235	370	40	48
300	83	114	935	475	378	606	365	200	108	400	668	340	235	370	61	79
350	92	127	1000	510	378	695	408	200	108	400	745	385	235	370	82	107
400	102	140	1145	590	378	755	446	240	128	400	827	425	235	370	122	150
450	114	152	1205	632	530	815	475	330	152	600	915	462	235	370	150	183
500	127	152	1256	665	530	905	525	370	168	600	995	500	235	370	204	254
600	154	178	1526	830	530	1050	610	370	320	600	1183	605	245	515	300	398
700	165	229	1640	903	530	1276	795	515	237	800	1460	734	245	515	462	--
800	190	241	1786	972	680	1384	837	515	237	800	1589	803	245	515	570	--
900	203	241	1917	1052	680	1500	885	515	237	800	1856	990	360	540	762	771
1000	216	300	2600	1170	680	1620	946	570	785	600	1958	1050	360	540	975	1179
1200	254	360	--	--	--	2185	1165	570	785	600	2013	1165	360	540	1678	1927




Triple Eccentric Flange Butterfly Valve

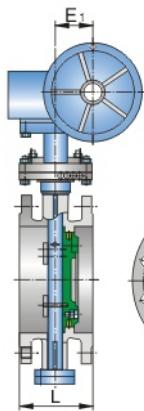

Worm Gear Flanged Butterfly Valve

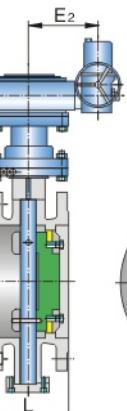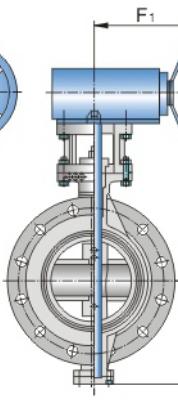

Electric Flanged Butterfly Valve

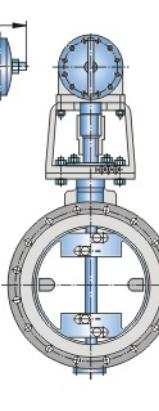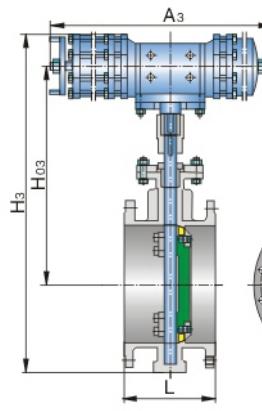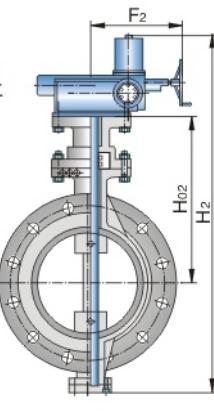

Pneumatic Flanged Butterfly Valve

Main Outline Dimensions and Weight

DN	L	Worm gear actuation					Electric				Pneumatic			Weight (kg)
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	
50	108	293	218	32	130	160	316	195	156	126	--	--	--	12
65	112	313	228	32	130	160	336	205	156	126	--	--	--	13
80	114	333	238	32	130	180	353	215	156	126	--	--	--	15
100	127	345	255	50	150	180	380	220	168	126	--	--	--	17
125	140	370	270	50	150	200	413	235	168	126	--	--	--	27
150	140	425	305	62	150	200	466	275	250	126	--	--	--	29
200	152	488	362	62	150	350	554	310	250	175	695	325	275	45
250	165	575	410	80	160	350	630	365	250	175	750	355	275	69
300	178	642	444	80	160	400	693	400	290	268	935	475	378	86
350	190	731	492	94	185	400	771	460	290	268	1000	510	378	122
400	216	786	522	94	185	600	837	490	290	268	1145	590	378	129
450	222	844	552	94	185	600	892	520	290	268	1205	632	530	200
500	229	945	606	132	232	600	973	590	290	268	1256	665	530	235
600	267	1060	666	132	232	800	1098	650	410	460	1526	830	530	291
700	292	1222	726	185	295	800	1252	750	410	460	1640	903	530	382
800	318	1340	862	185	295	400	1376	810	305	610	1786	972	680	480
900	330	1391	915	234	354	400	1417	905	305	610	1917	1052	680	627
1000	410	1596	1020	234	354	400	1575	960	385	650	2015	1210	1770	886
1200	470	1861	1075	296	354	400	1734	1115	385	650	2235	1360	1770	1197
1400	530	2066	1235	296	426	600	1908	1220	535	745	2476	1476	1890	1736
1600	600	2397	1355	410	426	600	2121	1410	535	745	2601	1599	1960	2527
1800	670	2647	1600	410	550	600	2512	1515	660	820	--	--	--	3311
2000	950	2901	1725	506	550	600	2857	1710	660	820	--	--	--	4102
2200	1000	3119	1970	506	666	800	3124	1820	825	920	--	--	--	5047
2400	1110	3324	2080	506	666	800	3375	1925	825	920	--	--	--	6377
2600	1190	3780	2351	568	762	800	3830	2100	825	920	--	--	--	7000
2800	1270	3933	2425	568	762	800	4100	2235	825	920	--	--	--	8120
3000	1350	4380	2600	568	762	800	4410	2370	825	920	--	--	--	9520

Note: Structural length of valves in the table: DN<2000, to ISO5752 13 series; DN>2000, to ISO5752 14 series.

Main Outline Dimensions and Weight

1.0MPa mm

DN	L	Worm gear actuation					Electric				Pneumatic			Weight (kg)
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	
50	108	295	195	32	125	160	316	215	156	126	--	--	--	12
65	112	313	205	32	125	180	336	228	156	126	--	--	--	13
80	114	330	215	32	125	180	353	238	156	126	--	--	--	15
100	127	350	225	32	150	200	380	255	168	126	--	--	--	17
125	140	408	265	44	160	200	413	270	168	126	--	--	--	27
150	140	446	285	44	160	350	466	305	250	126	--	--	--	29
200	152	527	345	64	170	350	554	362	250	175	740	367	275	45
250	165	595	375	64	170	400	630	410	250	175	900	443	378	69
300	178	679	430	64	190	400	693	444	290	268	990	493	378	86
350	190	744	465	94	190	600	771	492	290	268	1155	575	378	122
400	216	855	540	94	190	600	837	522	290	268	1205	600	530	150
450	222	910	570	132	230	600	892	522	290	268	1290	643	530	214
500	229	972	605	132	230	800	973	606	290	268	1395	705	530	263
600	267	1137	705	185	275	800	1098	666	410	460	1665	838	530	333
700	292	1255	765	185	275	400	1252	762	410	460	1882	942	680	473
800	318	1425	870	234	320	400	1575	1020	305	610	2093	1066	680	655
900	330	1531	925	234	320	400	1734	1075	305	610	2175	1210	1480	844
1000	410	1708	1035	296	370	400	1908	1235	385	650	2245	1275	4560	1078
1200	470	1941	1155	296	370	600	2121	1355	385	650	2375	1385	1830	1729
1400	530	2263	1350	410	475	600	2512	1600	535	745	2530	1510	1890	2247
1600	600	2507	1475	410	475	600	2857	1725	535	745	2779	1639	1960	3059
1800	670	2824	1670	506	570	600	3124	1970	660	820	--	--	--	3717
2000	950	3075	1780	506	570	800	3375	2080	660	820	--	--	--	4480
2200	1000	3481	2051	636	660	800	3780	2351	825	920	--	--	--	5880
2400	1110	3705	2125	636	660	800	3933	2425	825	920	--	--	--	7140

Note: Structural length of valves in the table: DN<2000, to ISO5752 13 series; DN>2000, to ISO5752 14 series.

Main Outline Dimensions and Weight

DN	L	Worm gear actuation					Electric				Pneumatic			Weight (kg)
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	
50	108	290	175	32	125	160	316	218	156	126	--	--	--	19
65	112	295	195	63	140	180	336	228	156	126	--	--	--	22
80	114	320	185	63	140	180	513	265	178	180	--	--	--	32
100	127	342	195	63	140	200	538	282	178	180	--	--	--	36
125	140	365	209	63	140	200	560	295	178	180	--	--	--	39
150	140	415	243	63	140	350	605	300	178	180	--	--	--	43
200	152	510	263	84	150	350	749	321	235	370	695	327	275	57
250	165	567	295	84	150	400	803	330	235	370	750	355	275	88
300	178	665	342	108	200	400	880	365	235	370	955	472	378	109
350	190	739	385	108	200	600	960	410	235	370	1033	515	378	144
400	216	825	430	152	240	600	1032	445	235	370	1185	595	530	200
450	222	910	469	152	240	600	1118	487	235	370	1270	632	530	238
500	229	990	500	168	300	800	1190	520	235	370	1335	665	530	326
600	267	1210	618	192	320	800	1380	625	235	370	1642	829	530	466
700	292	1475	746	338	237	400	1582	745	245	515	1795	905	680	592
800	318	1600	810	338	237	400	1713	810	245	515	1915	970	680	917
900	330	1870	1000	530	785	400	1870	875	360	540	1964	1239	140	1078
1000	410	2000	1065	530	785	400	2000	940	360	540	2096	1306	1770	1393
1200	470	2215	1170	530	785	600	2118	1060	360	540	2333	1418	1830	1855
1400	530	2430	1319	650	865	600	2328	1325	385	565	2591	1546	1890	2457
1600	600	2700	1443	650	865	600	2550	1450	385	565	2908	1738	2210	3360
1800	670	2938	1595	650	865	600	2816	1598	300	770	--	--	--	--
2000	950	3210	1743	650	865	800	3065	1743	684	794	--	--	--	--
2200	1000	3481	2051	636	660	800	3780	2351	825	920	--	--	--	--
2400	1110	3705	2125	636	660	800	3933	2425	825	920	--	--	--	--

Note: Structural length of valves in the table: DN<2000, to ISO5752 13 series; DN>2000, to ISO5752 14 series.

Main Outline Dimensions and Weight

DN	L	Worm gear actuation					Electric				Pneumatic			Weight (kg)
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	
50	108	290	175	63	140	180	316	218	156	126	--	--	--	19
65	112	295	195	63	140	200	336	228	156	126	--	--	--	22
80	114	320	185	63	140	200	552	265	178	180	--	--	--	32
100	127	350	200	63	140	350	585	290	178	180	--	--	--	36
125	140	375	210	63	140	350	610	305	178	180	--	--	--	39
150	140	425	245	84	150	400	765	315	178	180	--	--	--	42
200	152	526	270	84	150	400	820	304	235	370	740	367	275	67
250	165	590	302	108	200	600	910	336	235	370	890	443	378	98
300	178	695	360	108	200	600	1000	386	235	370	985	495	378	116
350	190	789	420	152	240	600	1055	425	235	370	1155	575	530	175
400	216	848	435	152	240	800	1108	456	235	370	1206	603	530	228
450	222	943	475	168	300	800	1140	490	235	370	1284	643	530	312
500	229	1079	550	192	320	400	1238	552	235	370	1390	705	535	354
600	267	1352	675	338	237	400	1399	635	245	515	1660	835	680	515
700	292	1495	759	338	237	400	1611	750	360	540	--	--	--	686
800	318	1640	835	530	785	400	1782	820	360	540	--	--	--	1155
900	330	1765	886	530	785	600	1915	886	385	565	--	--	--	1337
1000	410	1885	945	530	785	600	2040	945	385	565	--	--	--	1617
1200	470	2100	1055	650	865	600	2184	1053	300	770	--	--	--	2247
1400	530	2325	1163	650	865	600	2375	1164	684	794	--	--	--	--

2.5MPa mm

DN	L	Worm gear actuation					Electric				Pneumatic			Weight (kg)
		H1	H01	E1	F1	W1	H2	H02	E2	F2	H3	H03	A3	
50	108	350	238	63	140	350	354	238	178	180	625	513	250	--
65	112	370	255	84	150	400	389	255	178	180	625	510	250	--
80	114	380	260	84	150	400	530	260	235	370	645	525	250	--
100	127	420	298	108	200	600	555	298	235	370	675	537	250	--
125	140	460	325	108	200	600	582	325	235	370	715	551	450	--
150	140	555	380	152	240	60	609	350	235	370	800	625	450	--
200	152	760	460	152	240	800	755	385	235	370	850	650	450	84
250	165	830	587	168	300	800	818	437	235	370	925	682	450	158
300	178	895	645	192	320	400	912	485	235	370	1035	785	650	200
350	190	950	670	338	237	400	983	580	245	515	1070	790	650	235
400	216	1190	810	338	237	400	1058	600	360	540	1190	840	650	382
450	222	1225	850	338	237	400	1245	610	360	540	--	--	--	427
500	229	1285	857	530	785	600	1325	660	385	565	--	--	--	511
600	267	1357	885	530	785	600	1414	710	385	565	--	--	--	826

Note: Structural length of valves in the table: DN<2000, to ISO5752 13 series; DN>2000, to ISO5752 14 series.



YDB VALVES LLP

An ISO 9001:2015 Certified Manufacturing Co.

Head Office :

Y-21, Khan Real Industrial Estate,
N. H. 08, Pelhar, Vasai Phata,
Vasai East, Palghar - 401208.
INDIA.

Contact us: +91- 80 8701 0270

Write us: info@ydbvalves.com